

**25 YEARS OF FRONTIER™**

Rural Lifestyle Product Guide 2026





IF WE DON'T HAVE IT, YOU PROBABLY DON'T NEED IT.

## Explore a New Frontier™

Never underestimate the capabilities of your John Deere tractor—especially with nearly 400 implements and attachments available from Frontier. From landscaping and snow removal to seeding and tillage, you can undertake nearly any challenge on your acreage.

And you can be confident that every Frontier product will work as promised. Why? Because each one is designed, engineered, tested, and manufactured specifically for John Deere tractors. Plus, our equipment is fully supported with service, parts, and customer service throughout our North America John Deere dealer network—in addition to being backed with a two-year warranty<sup>1,2</sup> and a six-year gearbox warranty.<sup>1</sup>

<sup>1</sup>Warranties apply to products purchased as of November 1, 2025. Contact your local dealer or see [JohnDeere.com/TUWarranty](http://JohnDeere.com/TUWarranty) or [JohnDeere.ca/TUWarranty](http://JohnDeere.ca/TUWarranty).

<sup>2</sup>24-month warranty on new Frontier implements. Terms, conditions, exclusions, and warranty limitations apply.

This literature has been compiled for worldwide circulation. Features, specifications, and attachments subject to change without notice. While general information, pictures, and descriptions are provided, some illustrations and text may include finance, credit, insurance, product options, and accessories NOT AVAILABLE in all regions. PLEASE CONTACT AN AUTHORIZED JOHN DEERE DEALER FOR DETAILS. John Deere and Frontier reserve the right to change specifications, design, and price of the products described in this literature without notice.



Discover which implements and attachments are compatible with your tractor by scanning the QR code.

For 25 years, we've built implements to work with John Deere tractors like no other manufacturer in the world.

# Contents

## Landscape Equipment

|                                                      |   |
|------------------------------------------------------|---|
| Rear Blades                                          | 2 |
| Box Blades · Land Planes                             | 3 |
| Landscape Rakes · Post Hole Diggers                  | 4 |
| Soil Pulverizers · Wood Chippers · 3-Point Trenchers | 5 |
| Core Aerators · 3-Point Debris Blowers · Power Rakes | 6 |

## Cutting and Mowing Equipment

|                                                                             |   |
|-----------------------------------------------------------------------------|---|
| Rotary Cutters · Grooming Mowers                                            | 7 |
| Medium-Duty Grooming Mowers · Flex-Wing Grooming Mowers · Sickle Bar Mowers | 8 |
| Flail Mowers · Material Collection Systems                                  | 9 |

## Tillage Equipment

|                                                 |    |
|-------------------------------------------------|----|
| Tandem Disk Harrows · One-Row Cultivators       | 10 |
| Rotary Tillers · Plows                          | 11 |
| Field Cultivators · Subsoilers · Middle Busters | 12 |

## Seeding Equipment

|                                          |    |
|------------------------------------------|----|
| Overseeders · Conservation Seeders       | 13 |
| Broadcast Spreaders · Pendular Spreaders | 14 |

## Hay and Forage Equipment

|                                                                     |    |
|---------------------------------------------------------------------|----|
| Heavy-Duty Wheel Rake · High-Capacity Wheel Rakes                   | 15 |
| High-Capacity Carted Wheel Rakes · Carted Wheel Rakes · Hay Tedders | 16 |
| Bale Spears · Round-Bale Huggers                                    | 17 |

## Livestock and Equine Equipment

|                                                                 |    |
|-----------------------------------------------------------------|----|
| Sprayers                                                        | 18 |
| Manure Forks · Chain-Unloading Manure Spreaders · Pro Finishers | 19 |
| Inline Bale Wrapper · 3-Point-Bale Unroller                     | 20 |

## Snow Removal Equipment

|                                            |    |
|--------------------------------------------|----|
| 3-Point Snow Blowers                       | 21 |
| Front-Mounted Snow Blowers · Snow Pushes   | 22 |
| Front Blades · Tractor-Mounted Front Blade | 23 |

## Material Handling Equipment

|                                                           |    |
|-----------------------------------------------------------|----|
| Pallet Forks                                              | 24 |
| Mechanical Grapple · Pallet Fork Grapples · Root Grapples | 25 |
| Debris Grapples · Rock Buckets                            | 26 |
| 4-in-1 Buckets · Loader Carrier Adapters                  | 27 |
| Loader-Mount Rotary Brooms · Hydraulic Power Packs        | 28 |



# Landscape Equipment



## Rear Blades

Put your gardening, landscaping, driveway, and ditch-maintenance chores behind you with a sturdy rear blade.

| MODEL               | DUTY          | WORKING WIDTH      | ENGINE HP <sup>1</sup>    | HITCH       |
|---------------------|---------------|--------------------|---------------------------|-------------|
| RB2060L             | Economy       | 60 in. (152.4 cm)  | 25 hp (18.7 kW) maximum   | Ltd. Cat. 1 |
| RB2060              | Standard      | 60 in. (152.4 cm)  | 19–40 hp (14.1–29.8 kW)   | Cat. 1      |
| RB2160H             | Standard Plus | 60 in. (152.4 cm)  | 45 hp (33.6 kW) maximum   | Cat. 1      |
| RB2160              | Medium        | 60 in. (152.4 cm)  | 60 hp (44.7 kW) maximum   | Cat. 1      |
| RB2072              | Standard      | 72 in. (182.9 cm)  | 23–50 hp (17.1–37.3 kW)   | Cat. 1      |
| RB2172H             | Standard Plus | 72 in. (182.9 cm)  | 45 hp (33.6 kW) maximum   | Cat. 1      |
| RB2172              | Medium        | 72 in. (182.9 cm)  | 60 hp (44.7 kW) maximum   | Cat. 1      |
| RB2272              | Medium Plus   | 72 in. (182.9 cm)  | 70 hp (52.2 kW) maximum   | Cat. 2      |
| RB2084              | Standard      | 84 in. (213.4 cm)  | 27–50 hp (20.1–37.3 kW)   | Cat. 1      |
| RB2184H             | Standard Plus | 84 in. (213.4 cm)  | 45 hp (33.6 kW) maximum   | Cat. 1      |
| RB2184              | Medium        | 84 in. (213.4 cm)  | 60 hp (44.7 kW) maximum   | Cat. 1      |
| RB2284              | Medium Plus   | 84 in. (213.4 cm)  | 70 hp (52.2 kW) maximum   | Cat. 2      |
| RB2307 <sup>2</sup> | Heavy         | 84 in. (213.4 cm)  | 110 hp (82.0 kW) maximum  | Cat. 2      |
| RB2196H             | Standard Plus | 96 in. (243.8 cm)  | 45 hp (33.6 kW) maximum   | Cat. 1      |
| RB2196              | Medium        | 96 in. (243.8 cm)  | 60 hp (44.7 kW) maximum   | Cat. 1      |
| RB2296              | Medium Plus   | 96 in. (243.8 cm)  | 70 hp (52.2 kW) maximum   | Cat. 2      |
| RB2308 <sup>2</sup> | Heavy         | 96 in. (243.8 cm)  | 110 hp (82.0 kW) maximum  | Cat. 2      |
| RB2408 <sup>2</sup> | Heavy Plus    | 96 in. (243.8 cm)  | 145 hp (108.1 kW) maximum | Cat. 2 or 3 |
| RB2309 <sup>2</sup> | Heavy         | 108 in. (274.3 cm) | 110 hp (82.0 kW) maximum  | Cat. 2      |
| RB2409 <sup>2</sup> | Heavy Plus    | 108 in. (274.3 cm) | 145 hp (108.1 kW) maximum | Cat. 2 or 3 |
| RB2310 <sup>2</sup> | Heavy         | 120 in. (304.8 cm) | 110 hp (82.0 kW) maximum  | Cat. 2      |
| RB2410 <sup>2</sup> | Heavy Plus    | 120 in. (304.8 cm) | 145 hp (108.1 kW) maximum | Cat. 2 or 3 |

<sup>1</sup>Engine horsepower requirements listed for four-wheel drive (4WD) tractors. See Operator's Manual for two-wheel drive (2WD) tractor engine horsepower requirements and additional power or weight requirements

<sup>2</sup>Hydraulic tilt, swing, and shift functions available.

## Box Blades

Frontier box blades level uneven ground and simplify contouring and grading. The heavy-duty BB52 Series comes standard with hydraulic scarifiers.



| MODEL   | DUTY     | WORKING WIDTH       | ENGINE HP <sup>1</sup>   | HITCH        |
|---------|----------|---------------------|--------------------------|--------------|
| BB5048L | Economy  | 48 in. (121.9 cm)   | 45 hp (33.6 kW) maximum  | Ltd. Cat. 1  |
| BB5060L | Economy  | 60 in. (152.4 cm)   | 45 hp (33.6 kW) maximum  | Ltd. Cat. 1  |
| BB5048  | Standard | 48 in. (121.9 cm)   | 45 hp (33.6 kW) maximum  | Cat. 1       |
| BB5060  | Standard | 61.5 in. (156.2 cm) | 65 hp (48.5 kW) maximum  | Cat. 1       |
| BB5065  | Standard | 66 in. (167.6 cm)   | 55 hp (41.0 kW) maximum  | Cat. 1       |
| BB5072  | Standard | 73.5 in. (186.7 cm) | 65 hp (48.5 kW) maximum  | Cat. 1       |
| BB5084  | Standard | 85.5 in. (217.2 cm) | 65 hp (48.5 kW) maximum  | Cat. 1       |
| BB5096  | Standard | 97.5 in. (247.7 cm) | 65 hp (48.5 kW) maximum  | Cat. 1       |
| BB2172  | Medium   | 72 in. (182.9 cm)   | 70 hp (52.2 kW) maximum  | Cat. 1       |
| BB2184  | Medium   | 84 in. (213.4 cm)   | 70 hp (52.2 kW) maximum  | Cat. 1       |
| BB5172  | Heavy    | 72 in. (182.9 cm)   | 120 hp (86.5 kW) maximum | Cat. 1 and 2 |
| BB5184  | Heavy    | 84 in. (213.4 cm)   | 120 hp (86.5 kW) maximum | Cat. 1 and 2 |
| BB5196  | Heavy    | 96 in. (243.8 cm)   | 120 hp (86.5 kW) maximum | Cat. 1 and 2 |
| BB5272  | Heavy    | 72 in. (182.9 cm)   | 120 hp (86.5 kW) maximum | Cat. 1 and 2 |
| BB5284  | Heavy    | 84 in. (213.4 cm)   | 120 hp (86.5 kW) maximum | Cat. 1 and 2 |
| BB5296  | Heavy    | 96 in. (243.8 cm)   | 120 hp (86.5 kW) maximum | Cat. 1 and 2 |

## Land Planes

Level driveways, fill potholes, or recondition gravel areas with all-purpose land planes. A durable frame allows you to smooth over challenging terrain. Heavy-duty options available.



| MODEL   | WORKING WIDTH     | SCARIFIERS | ENGINE HP <sup>1</sup>  | HITCH        |
|---------|-------------------|------------|-------------------------|--------------|
| LP2054L | 54 in. (137.2 cm) | 4          | 18–30 hp (13.4–22.4 kW) | Ltd. Cat. 1  |
| LP2160  | 60 in. (152.4 cm) | 4          | 25–50 hp (18.6–37.3 kW) | Cat. 1       |
| LP2172  | 72 in. (182.9 cm) | 5          | 35–50 hp (26.1–37.3 kW) | Cat. 1       |
| LP2184  | 84 in. (213.4 cm) | 6          | 40–90 hp (29.8–67.1 kW) | Cat. 1 and 2 |
| LP2196  | 96 in. (243.8 cm) | 7          | 40–90 hp (29.8–67.1 kW) | Cat. 1 and 2 |

<sup>1</sup>Engine horsepower requirements listed for four-wheel drive (4WD) tractors. See Operator's Manual for two-wheel drive (2WD) tractor engine horsepower requirements and additional power or weight requirements.



## Landscape Rakes

Cleaning up and grooming your land is simple with a landscape rake. From debris and brush removal to surface leveling and final seed preparation, this implement is up to the challenge of tough landscaping jobs.

| MODEL   | DUTY     | WORKING WIDTH     | ENGINE HP               | HITCH       |
|---------|----------|-------------------|-------------------------|-------------|
| LR5048L | Economy  | 48 in. (121.9 cm) | 45 hp (33.6 kW) maximum | Ltd. Cat. 1 |
| LR5060L | Economy  | 60 in. (152.4 cm) | 45 hp (33.6 kW) maximum | Ltd. Cat. 1 |
| LR5060  | Standard | 60 in. (152.4 cm) | 65 hp (48.5 kW) maximum | Cat. 1      |
| LR5072  | Standard | 72 in. (182.9 cm) | 65 hp (48.5 kW) maximum | Cat. 1      |
| LR5084  | Standard | 84 in. (213.4 cm) | 65 hp (48.5 kW) maximum | Cat. 1      |
| LR5096  | Standard | 96 in. (243.8 cm) | 65 hp (48.5 kW) maximum | Cat. 1      |
| LR2172  | Medium   | 72 in. (182.9 cm) | 23–55 hp (17.2–41.0 kW) | Cat. 1      |
| LR2184  | Medium   | 84 in. (213.4 cm) | 23–55 hp (17.2–41.0 kW) | Cat. 1      |
| LR2196  | Medium   | 96 in. (243.8 cm) | 27–55 hp (20.1–41.0 kW) | Cat. 1      |



## Post Hole Diggers

Drill down quickly and deeply on the farm or on the jobsite with a post hole digger.

| MODEL  | AUGER LENGTH      | ENGINE HP               | HITCH                  |
|--------|-------------------|-------------------------|------------------------|
| PHD125 | 36 in. (91.4 cm)  | 15–25 hp (11.2–18.6 kW) | Cat. 1 and Ltd. Cat. 1 |
| PHD235 | 48 in. (121.9 cm) | 20–35 hp (14.9–26.1 kW) | Cat. 1                 |
| PHD395 | 48 in. (121.9 cm) | 35–95 hp (26.1–70.8 kW) | Cat. 1 and 2           |

## Soil Pulverizers

Sod growers, landowners, landscapers, and contractors can prepare soil for seeding or sodding with a soil pulverizer.



| MODEL   | DUTY     | WORKING WIDTH     | ENGINE HP               | SCARIFIER TEETH | HITCH  |
|---------|----------|-------------------|-------------------------|-----------------|--------|
| SP2048B | Standard | 48 in. (121.9 cm) | 30–45 hp (22.3–33.6 kW) | Bar Type        | Cat. 1 |
| SP2060B | Standard | 60 in. (152.4 cm) | 30–45 hp (22.4–33.6 kW) | Bar Type        | Cat. 1 |
| SP2072B | Standard | 72 in. (182.9 cm) | 30–45 hp (22.4–33.6 kW) | Bar Type        | Cat. 1 |

## Wood Chippers

Wood chippers make big cleanup jobs fast and easy. They quickly chew up tree branches, turning them into wood chips or wood chip mulch.



| MODEL  | FEED OPENING                | LIMB            | ENGINE HP               | HITCH        |
|--------|-----------------------------|-----------------|-------------------------|--------------|
| WC1103 | 3 x 5.5 in. (7.6 x 14.0 cm) | 3 in. (7.6 cm)  | 18–40 hp (13.4–29.8 kW) | Cat. 1       |
| WC1105 | 5.5 x 8 in. (14 x 20.3 cm)  | 5 in. (12.7 cm) | 25–85 hp (18.6–63.4 kW) | Cat. 1 and 2 |
| WC1205 | 5.5 x 8 in. (14 x 20.3 cm)  | 5 in. (12.7 cm) | 35–95 hp (26.1–70.8 kW) | Cat. 1 and 2 |

## 3-Point Trenchers

Dig uniform trenches for any small drainage or utility project with the 3-point trencher. Just hitch up to a compact tractor and go.



| MODEL  | BOOM LENGTH      | PTO HP                  | TRANSMISSION REQUIREMENTS | HITCH  |
|--------|------------------|-------------------------|---------------------------|--------|
| DT1136 | 36 in. (91.4 cm) | 15–30 hp (11.2–22.4 kW) | Hydrostatic Transmission  | Cat. 1 |



## Core Aerators

Keep your lawn, park, or golf course healthy with a core aerator. These tools help reduce soil compaction and promote air, water, and nutrient circulation. Holes created by the aerator also provide a place for seeds to contact soil and germinate.

| MODEL   | DUTY     | WORKING WIDTH     | ENGINE HP               | HITCH        |
|---------|----------|-------------------|-------------------------|--------------|
| CA2048E | Economy  | 48 in. (121.9 cm) | 20–50 hp (14.9–37.3 kW) | Cat. 1       |
| CA2060E | Economy  | 60 in. (152.4 cm) | 20–50 hp (14.9–37.3 kW) | Cat. 1       |
| CA2072E | Economy  | 72 in. (182.9 cm) | 20–50 hp (14.9–37.3 kW) | Cat. 1       |
| CA2060  | Standard | 60 in. (152.4 cm) | 20–70 hp (14.9–52.2 kW) | Cat. 1 and 2 |
| CA2072  | Standard | 72 in. (182.9 cm) | 20–70 hp (14.9–52.2 kW) | Cat. 1 and 2 |



## 3-Point Debris Blowers

Put the final touches on landscape projects with a 3-point debris blower. They are ideal for quick cleanup of sidewalks, driveways, and golf courses.

| MODEL  | PTO HP                  | HITCH        |
|--------|-------------------------|--------------|
| BL1130 | 30 hp (22.4 kW) minimum | Cat. 1 and 2 |



## Power Rakes

Versatile power rakes make it fast and convenient to cultivate, level, grade, or restore soil surfaces.

| MODEL  | ANGLE ADJUSTMENT | WORKING WIDTH     | PTO HP                                       | HITCH        |
|--------|------------------|-------------------|----------------------------------------------|--------------|
| PR1148 | Hydraulic        | 48 in. (121.9 cm) | 15–22 PTO hp (11.2–16.4 kW)                  | Cat. 1       |
| PR1160 | Hydraulic        | 60 in. (152.4 cm) | 18–35 PTO hp (13.4–26.1 kW)                  | Cat. 1       |
| PR1172 | Hydraulic        | 72 in. (182.9 cm) | 30–40 PTO hp (22.4–29.8 kW)                  | Cat. 1       |
| PR1184 | Hydraulic        | 84 in. (213.4 cm) | 42–80 tractor hp <sup>1</sup> (31.3–59.6 kW) | Cat. 1 and 2 |

<sup>1</sup>Tractor must meet ASAE lift capacity requirement.

# Cutting and Mowing Equipment

Cutting and Mowing Equipment

## Rotary Cutters<sup>1</sup>

If you need a rugged, affordable rotary cutter that can handle heavy grass, thick brush, and weeds, a Frontier rotary cutter is worth a closer look.



| MODEL  | WORKING WIDTH     | PTO HP                  | HITCH        |
|--------|-------------------|-------------------------|--------------|
| RC2048 | 48 in. (121.9 cm) | 18–45 hp (13.4–33.6 kW) | Cat. 1 and 2 |
| RC2060 | 60 in. (152.4 cm) | 19–65 hp (14.2–48.5 kW) | Cat. 1 and 2 |
| RC2072 | 72 in. (182.9 cm) | 25–65 hp (18.6–48.5 kW) | Cat. 1 and 2 |
| RC2084 | 84 in. (213.4 cm) | 45–90 hp (33.6–67.1 kW) | Cat. 1 and 2 |

## Grooming Mowers

The grooming mower delivers a smooth cut for lawns, sports fields, and golf courses.



| MODEL   | WORKING WIDTH     | PTO HP                  | HITCH                  |
|---------|-------------------|-------------------------|------------------------|
| GM4060E | 60 in. (152.4 cm) | 15–35 hp (11.2–26.1 kW) | Cat. 1 and Ltd. Cat. 1 |
| GM4072E | 72 in. (182.9 cm) | 25–35 hp (18.6–26.1 kW) | Cat. 1                 |
| GM2060R | 60 in. (152.4 cm) | 20–50 hp (14.9–37.3 kW) | Cat. 1                 |
| GM2072R | 72 in. (182.9 cm) | 20–50 hp (14.9–37.3 kW) | Cat. 1                 |
| GM2084R | 84 in. (213.4 cm) | 20–50 hp (14.9–37.3 kW) | Cat. 1                 |
| GM4060  | 60 in. (152.4 cm) | 15–50 hp (11.2–37.3 kW) | Cat. 1                 |
| GM4072  | 72 in. (182.9 cm) | 20–50 hp (14.9–37.3 kW) | Cat. 1                 |
| GM4084  | 84 in. (213.4 cm) | 25–50 hp (18.6–37.3 kW) | Cat. 1                 |

<sup>1</sup>Quik-Knect™ system and Quick-Hitch compatible.



## Medium-Duty Grooming Mowers<sup>1</sup>

To maintain a clean and level look for various lawn types, Frontier medium-duty grooming mowers feature rear discharge and a high-speed blade. They are also compatible with the iMatch™ hitch system (optional kit available).

| MODEL   | WORKING WIDTH      | ENGINE HP               | DECK THICKNESS | HITCH  |
|---------|--------------------|-------------------------|----------------|--------|
| GM1190  | 90 in. (228.6 cm)  | 25–50 hp (18.6–37.3 kW) | 7 Gauge Steel  | Cat. 1 |
| GM2109R | 110 in. (279.4 cm) | 40–70 hp (28.9–52.2 kW) | 8 Gauge Steel  | Cat. 1 |
| GM2190R | 90 in. (228.6 cm)  | 30–70 hp (22.4–52.2 kW) | 8 Gauge Steel  | Cat. 1 |



## Flex-Wing Grooming Mowers

Go with the flex-wing grooming mowers for a quality cut on uneven fields. They feature wider working widths to make quick work on sod farms, golf courses, and parks.

| MODEL  | WORKING WIDTH | PTO HP                  | HITCH        |
|--------|---------------|-------------------------|--------------|
| FM4012 | 12 ft (3.7 m) | 25–60 hp (18.6–44.7 kW) | Pull-Type    |
| FM4112 | 12 ft (3.7 m) | 30 hp (22.4 kW) minimum | Clevis Hitch |
| FM4115 | 15 ft (4.6 m) | 35 hp (26.1 kW) minimum | Clevis Hitch |
| FM4117 | 17 ft (5.2 m) | 40 hp (29.8 kW) minimum | Clevis Hitch |



## Sickle Bar Mowers

Sickle bar mowers mow up or down hillsides with a blade angle that can be adjusted from -45 degrees to +90 degrees.

| MODEL  | WORKING WIDTH        | ENGINE HP               | HITCH                           |
|--------|----------------------|-------------------------|---------------------------------|
| SB3106 | 5 ft, 9 in. (1.75 m) | 25–50 hp (18.6–37.3 kW) | Cat 1, Cat 2, iMatch Compatible |
| SB3107 | 6 ft, 9 in. (2.05 m) | 25–50 hp (18.6–37.3 kW) | Cat 1, Cat 2, iMatch Compatible |
| SB3108 | 7 ft, 8 in. (2.35 m) | 25–50 hp (18.6–37.3 kW) | Cat 1, Cat 2, iMatch Compatible |

<sup>1</sup>Quik-Knect compatible.

## Flail Mowers

Frontier flail mowers handle tough brush and turf grass equally well. Sharp knives cut and reduce material to a smaller size, providing a finished look in various settings.



| MODEL   | CUTTING WIDTH     | ENGINE HP                   | MINIMUM TRACTOR WEIGHT | HITCH        |
|---------|-------------------|-----------------------------|------------------------|--------------|
| FL1053  | 53 in. (134.6 cm) | 20 – 45 hp (15 – 33.6 kW)   | 1,400 lb. (635 kg)     | Cat. 1       |
| FL1061  | 61 in. (155 cm)   | 25 – 45 hp (18.6 – 33.6 kW) | 1,550 lb. (703.1 kg)   | Cat. 1       |
| FL1045S | 45 in. (114.3 cm) | 15 – 45 hp (11.2 – 33.6 kW) | 2,600 lb. (1,179.3 kg) | Cat. 1       |
| FL1061S | 61 in. (155 cm)   | 25 – 45 hp (18.6 – 33.6 kW) | 2,600 lb. (1,179.3 kg) | Cat. 1       |
| FL1163  | 63 in. (160 cm)   | 30 – 55 hp (22.4 – 41 kW)   | 2,600 lb. (1,179.3 kg) | Cat. 1       |
| FL1169  | 69 in. (175.3 cm) | 35 – 55 hp (26.1 – 41 kW)   | 2,600 lb. (1,179.3 kg) | Cat. 1       |
| FL1163S | 63 in. (160 cm)   | 45 – 75 hp (33.6 – 56 kW)   | 3,700 lb. (1,678.3 kg) | Cat. 1       |
| FL1169S | 69 in. (175.3 cm) | 50 – 75 hp (37.3 – 56 kW)   | 3,700 lb. (1,678.3 kg) | Cat. 1       |
| FL1262  | 62 in. (157 cm)   | 35 – 80 hp (26.1 – 59.7 kW) | 2,600 lb. (1,179.3 kg) | Cat. 1 and 2 |
| FL1291  | 91 in. (231 cm)   | 50 – 80 hp (37.3 – 59.7 kW) | 2,600 lb. (1,179.3 kg) | Cat. 1 and 2 |
| FL1272S | 72 in. (183 cm)   | 40 – 105 hp (30 – 78.3 kW)  | 5,300 lb. (2,404 kg)   | Cat. 2       |

## Material Collection Systems

Attach the Frontier material collection system to your compatible John Deere drive-over mower deck and make cleaning up grass clippings and leaves from your lawn easier than it's ever been.



| MODEL  | HOPPER CAPACITY     | MOWER COMPATIBILITY | TRACTOR COMPATIBILITY                                  |
|--------|---------------------|---------------------|--------------------------------------------------------|
| MC2014 | 14 Bushel (393.3 L) | 54D, 60D, 72D       | 1023E, 1025R, 2025R, 2032R, 2038R, 3033R, 3039R, 3046R |
| MC2120 | 20 Bushel (704.8 L) | 54D, 60D, 72D       | 1023E, 1025R, 2025R, 2032R, 2038R, 3033R, 3039R, 3046R |

You, John Deere, and Frontier. Let's work together.

# Tillage Equipment



## Tandem Disk Harrows

Breaking up tough ground calls for tough equipment. Like our tandem disk harrows. Notched front blades are standard. Gang angles are easy to adjust requiring no tools.

| MODEL   | WORKING WIDTH                         | ENGINE HP                | WEIGHT                                               | DISK QTY.      | HITCH          |
|---------|---------------------------------------|--------------------------|------------------------------------------------------|----------------|----------------|
| TM1048L | 48 in. (121.9 cm)                     | 15–25 hp (11.2–18.6 kW)  | 437 lb. (198.2 kg)                                   | 12             | Limited Cat. 1 |
| TM1062L | 62 in. (157.5 cm)                     | 20–35 hp (14.9–26.1 kW)  | 490 lb. (222.3 kg)                                   | 16             | Limited Cat. 1 |
| TM1164  | 62 in. (157.5 cm)                     | 25–50 hp (18.6–37.3 kW)  | 684 lb. (310.3 kg)                                   | 16             | Cat. 1         |
| TM1173  | 73 in. (185.4 cm)                     | 35–75 hp (26.1–55.9 kW)  | 721 lb. (327 kg)                                     | 16             | Cat. 1         |
| TM1179  | 79 in. (200.7 cm)                     | 35–75 hp (26.1–55.9 kW)  | 764 lb. (346.5 kg)                                   | 20             | Cat. 1         |
| TM1275  | 75 in. (190.5 cm)                     | 40–75 hp (29.8–55.9 kW)  | 1000 lb. (453.6 kg)                                  | 16             | Cat. 1         |
| TM1292  | 92 in. (233.7 cm)                     | 40–75 hp (29.8–55.9 kW)  | 1140 lb. (517.1 kg)                                  | 20             | Cat. 1         |
| TM1395  | 96 in. (243.8 cm)                     | 45–100 hp (33.6–74.6 kW) | 1350 lb. (612.3 kg)                                  | 20             | Cat. 1 and 2   |
| TM1411D | 124 or 128 in.<br>(315 or 325.1 cm)   | 45–75 hp (33.6–56.2 kW)  | 3,086–3,232 lb.<br>(1,399.8–1,466 kg) <sup>1</sup>   | 28–32          | Drawn          |
| TM1412D | 138 or 145 in.<br>(350.5 or 368.3 cm) | 55–80 hp (41.1–59.6 kW)  | 2,900–3,066 lb.<br>(1,315.4–1,390.7 kg) <sup>1</sup> | 32–36<br>32–36 | Drawn<br>Drawn |



## One-Row Cultivators

Control weeds with the one-row cultivator. Adjustable row widths make this tool valuable for gardeners and small farm operators.

| MODEL  | ROW WIDTH                 | TRACTOR HP              | HITCH        |
|--------|---------------------------|-------------------------|--------------|
| PC1001 | 30–60 in. (76.2–152.4 cm) | 25–45 hp (18.6–33.6 kW) | 3-Pt. Cat. 1 |

<sup>1</sup>Operating weight of TM14 Series Tandem Disk Harrows are dependent on working width selected. See Operator's Manual for more details.

## Rotary Tillers

Put the final touches on gardens or seedbeds before planting with a rotary tiller.



| MODEL                | DUTY     | WORKING WIDTH     | ENGINE HP                | HITCH              |
|----------------------|----------|-------------------|--------------------------|--------------------|
| RT3042               | Standard | 42 in. (106.7 cm) | 15–35 hp (11.2–26.1 kW)  | Ltd. Cat. 1        |
| RT3042R <sup>1</sup> | Standard | 42 in. (106.7 cm) | 15–35 hp (11.2–26.1 kW)  | Ltd. Cat. 1        |
| RT3049               | Standard | 49 in. (124.5 cm) | 18–35 hp (13.4–26.1 kW)  | Ltd. Cat. 1        |
| RT3049R <sup>1</sup> | Standard | 49 in. (124.5 cm) | 18–35 hp (13.4–26.1 kW)  | Ltd. Cat. 1        |
| RT3062               | Standard | 62 in. (157.5 cm) | 24–60 hp (17.9–44.7 kW)  | Cat. 1             |
| RT3062R <sup>1</sup> | Standard | 62 in. (157.5 cm) | 24–60 hp (17.9–44.7 kW)  | Cat. 1             |
| RT3073               | Standard | 73 in. (185.4 cm) | 30–60 hp (22.4–44.7 kW)  | Cat. 1 and 2       |
| RT3073R <sup>1</sup> | Standard | 73 in. (185.4 cm) | 30–60 hp (22.4–44.7 kW)  | Cat. 1 and 2       |
| RT3081               | Standard | 81 in. (205.7 cm) | 40–60 hp (29.8–44.7 kW)  | Cat. 1 and 2       |
| RT3081R <sup>1</sup> | Standard | 81 in. (205.7 cm) | 40–60 hp (29.8–44.7 kW)  | Cat. 1 and 2       |
| RT1265               | Medium   | 65 in. (165.1 cm) | 30–60 hp (22.4–44.7 kW)  | 3-Pt. Cat. 1 and 2 |
| RT1273               | Medium   | 73 in. (185.4 cm) | 30–80 hp (22.4–59.7 kW)  | 3-Pt. Cat. 2       |
| RT2283               | Medium   | 83 in. (210.8 cm) | 30–80 hp (22.4–59.7 kW)  | 3-Pt. Cat. 2       |
| RT2293               | Medium   | 93 in. (236.2 cm) | 40–100 hp (29.8–74.6 kW) | 3-Pt. Cat. 2       |

## Plows

Prepare garden space or planting areas with one- and two-bottom plows. Our 3-point plows allow you to turn over sod in your field or backyard.



| MODEL  | MOLDBOARD  | WIDTH             | ENGINE HP               | HITCH        |
|--------|------------|-------------------|-------------------------|--------------|
| PB1001 | One-Bottom | 14 in. (35.6 cm)  | 25–50 hp (13.4–37.3 kW) | 3-Pt. Cat. 1 |
| PB1002 | Two-Bottom | 40 in. (101.6 cm) | 25–50 hp (13.4–37.3 kW) | 3-Pt. Cat. 1 |

<sup>1</sup>Rotary tiller model numbers ending in "R" indicate reverse tine rotation



## Field Cultivators

Prepare seedbeds, mix crop residue into soil, and blend soil to provide water and nutrients to crops with a versatile field cultivator.

| MODEL  | MOLDBOARD  | WIDTH            | ENGINE HP               | HITCH        |
|--------|------------|------------------|-------------------------|--------------|
| PB1001 | One-Bottom | 14 in. (35.6 cm) | 25–50 hp (13.4–37.3 kW) | 3-Pt. Cat. 1 |



## Subsoilers

This subsoiler features a steel shank with reversible point that rips through hard ground to break up compaction, improving water drainage and root growth.

| MODEL  | WORKING DEPTH        | ENGINE HP               | HITCH          |
|--------|----------------------|-------------------------|----------------|
| PS1001 | Up to 24 in. (61 cm) | 25–45 hp (18.6–33.6 kW) | 3-Pt. / Cat. 1 |



## Middle Busters

Break up hard ground between garden rows using a convenient middle buster equipped with a double-wing cutting blade.

| MODEL  | WORKING DEPTH          | ENGINE HP               | HITCH          |
|--------|------------------------|-------------------------|----------------|
| PM1001 | Up to 12 in. (30.5 cm) | 25–45 hp (18.6–33.6 kW) | 3-Pt. / Cat. 1 |

# Seeding Equipment



## Overseeders

Get the lush, green turf you demand with a Frontier overseeder. Perfect for property owners, golf courses, school systems, and municipalities.



| MODEL   | DRIVE         | WORKING WIDTH     | ENGINE HP                | HITCH        |
|---------|---------------|-------------------|--------------------------|--------------|
| GS4048L | Ground Driven | 48 in. (121.9 cm) | 15–35 hp (11.2–26.1 kW)  | Ltd. Cat. 1  |
| GS4060L | Ground Driven | 60 in. (152.4 cm) | 20–45 hp (14.9–33.6 kW)  | Ltd. Cat. 1  |
| GS4160  | Ground Driven | 60 in. (152.4 cm) | 30–65 hp (22.3–48.5 kW)  | Cat. 1 and 2 |
| GS4172  | Ground Driven | 72 in. (182.8 cm) | 40–125 hp (30–93.2 kW)   | Cat. 1 and 2 |
| GS4184  | Ground Driven | 84 in. (213.3 cm) | 50–125 hp (37.2–93.2 kW) | Cat. 1 and 2 |

## Conservation Seeders

Renovate pastures or landscape roadsides with a conservation seeder. They make quick work of any type of seeding, from native prairie grasses to large legumes.



| MODEL  | WORKING WIDTH | ENGINE HP               | HITCH        |
|--------|---------------|-------------------------|--------------|
| CS1360 | 5 ft (1.5 m)  | 30 hp (22.4 kW) minimum | Cat. 1 and 2 |
| CS1384 | 7 ft (2.1 m)  | 50 hp (37.3 kW) minimum | Cat. 1 and 2 |



## Broadcast Spreaders

Cover a lot of ground in a hurry with a broadcast spreader. These spreaders distribute fertilizer, salt, sand, small grains, and more.

| MODEL   | MAXIMUM SPREAD WIDTH | WEIGHT FULL      | MAXIMUM PTO HP  | HITCH        |
|---------|----------------------|------------------|-----------------|--------------|
| SS1022B | 20 ft (6.1 m)        | 288 lb. (131 kg) | 30 hp (22.4 kW) | Pull-Type    |
| SS1023B | 23 ft (7.0 m)        | 379 lb. (172 kg) | 50 hp (37.3 kW) | Cat. 0 and 1 |
| SS1035B | 20 ft (6.1 m)        | 446 lb. (202 kg) | 45 hp (33.6 kW) | Pull-Type    |
| SS1036B | 23 ft (7.0 m)        | 498 lb. (226 kg) | 50 hp (37.3 kW) | Cat. 1       |
| SS1067B | 46 ft (14.0 m)       | 842 lb. (382 kg) | 50 hp (37.3 kW) | Cat. 1       |
| SS2036B | 23 ft (7.0 m)        | 498 lb. (226 kg) | 50 hp (37.3 kW) | Cat. 1       |
| SS2067B | 46 ft (14.0 m)       | 842 lb. (382 kg) | 50 hp (37.3 kW) | Cat. 1       |
| SS3067B | 49 ft (14.9 m)       | 988 lb. (448 kg) | 60 hp (44.7 kW) | Cat. 1       |



## Pendular Spreaders

A precision pendular spreader provides uniform spreading, even if materials have different weights, sizes, and textures.

| MODEL   | SPREAD WIDTH             | WEIGHT FULL                         | MAXIMUM PTO HP  | HITCH        |
|---------|--------------------------|-------------------------------------|-----------------|--------------|
| SS1079P | 17–47 ft<br>(5.2–14.3 m) | 832 or 1,089 lb.<br>(377 or 494 kg) | 60 hp (44.7 kW) | Cat. 1       |
| SS1116P | 17–47 ft<br>(5.2–14.3 m) | 1,737 lb.<br>(787 kg)               | 60 hp (44.7 kW) | Cat. 1 and 2 |
| SS1180P | 17–47 ft (5.2–14.3 m)    | 2,387 lb.<br>(1,083 kg)             | 60 hp (44.7 kW) | Cat. 1 and 2 |
| SS1220P | 17–47 ft<br>(5.2–14.3 m) | 2,778 lb.<br>(1,260 kg)             | 60 hp (44.7 kW) | Cat. 1 and 2 |




FRONTIER

## Trailer Mover

The Frontier trailer mover features a heavy-duty design capable of lifting up to 3,000 pounds (1,360.8 kg). Easily move your bumper pull or gooseneck trailer.

- iMatch™ Quick Hitch compatible.
- Category 1 pins included.
- 2-in. Receiver Mount with safety chain slots.
- Includes 2½-in. ball hitch for gooseneck trailers.
- Rated for trailers up to 3,000 lb. (1,360.8 kg).
- Features a corrosion-resistant powder coating for long-lasting use.
- Bushings are sold separately.

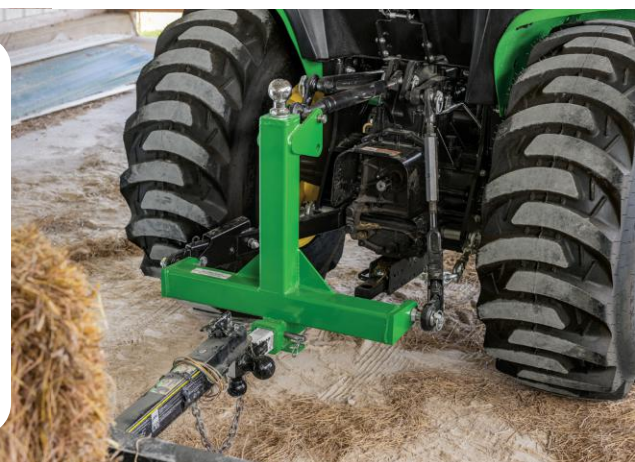

# Hay and Forage Equipment

## Heavy-Duty Wheel Rake

Rake more hay in less time with the heavy-duty wheel rake. Large, wind-panel rake wheels gather hay faster so you can start baling sooner.



| MODEL  | RAKING WIDTH                | WINDROW WIDTH                   | TRANSPORT WIDTH      | # OF WHEELS |
|--------|-----------------------------|---------------------------------|----------------------|-------------|
| WR5417 | 16.5–29 ft<br>(5.02–8.83 m) | 24–72.3 in.<br>(60.96–183.6 cm) | 12.33 ft<br>(3.75 m) | 17 Wheels   |

## High-Capacity Wheel Rakes

High-capacity wheel rakes give you the performance and consistency to engage nearly any type of terrain.



| MODEL  | RAKING WIDTH          | WINDROW WIDTH                | TRANSPORT WIDTH | # OF WHEELS |
|--------|-----------------------|------------------------------|-----------------|-------------|
| WR1212 | 24 ft (7.3 m) maximum | 38–58 in.<br>(96.5–147.3 cm) | 8 ft (2.44 m)   | 12 Wheels   |
| WR1214 | 28 ft (8.5 m) maximum | 38–58 in.<br>(96.5–147.3 cm) | 8.1 ft (2.46 m) | 14 Wheels   |
| WR1216 | 32 ft (9.8 m) maximum | 38–58 in.<br>(96.5–147.3 cm) | 8.1 ft (2.46 m) | 16 Wheels   |



## High-Capacity Carted Wheel Rakes

High-capacity carted wheel rakes provide fast raking speed without sacrificing performance to maximize hay quality and retain feed value.

| MODEL  | RAKING WIDTH                             | WINDROW WIDTH                             | TRANSPORT WIDTH | # OF WHEELS |
|--------|------------------------------------------|-------------------------------------------|-----------------|-------------|
| WR3208 | 16 ft, 6 in. – 17 ft, 8 in.<br>(5–5.4 m) | 4 ft, 5 in. – 6 ft, 10 in.<br>(1.3–2.1 m) | 12 ft (3.66 m)  | 8 Wheels    |
| WR3210 | 18 ft, 5 in. – 21 ft<br>(5.6–6.4 m)      | 3 ft, 3 in. – 7 ft, 3 in.<br>(1–2.2 m)    | 12 ft (3.66 m)  | 10 Wheels   |
| WR3212 | 21 ft–24 ft, 4 in.<br>(6.4–7.4 m)        | 2 ft, 10 in. – 7 ft, 3 in.<br>(0.9–2.2 m) | 12 ft (3.66 m)  | 12 Wheels   |



## Carted Wheel Rakes

Carted wheel rakes provide optimum maneuverability and extra down-pressure to adjust to land contours for tough raking jobs.

| MODEL  | RAKING WIDTH                 | WINDROW WIDTH              | TRANSPORT WIDTH      | # OF WHEELS |
|--------|------------------------------|----------------------------|----------------------|-------------|
| WR0008 | 17 ft, 8 in. (5.4 m)         | 24–51 in. (61 to 129.5 cm) | 8 ft, 2 in. (2.49 m) | 8 Wheels    |
| WR0010 | 21 ft (6.4 m) maximum        | 24–51 in. (61 to 129.5 cm) | 8 ft, 2 in. (2.49 m) | 10 Wheels   |
| WR0012 | 24 ft, 4 in. (7.4 m) maximum | 24–51 in. (61 to 129.5 cm) | 8 ft, 2 in. (2.49 m) | 12 Wheels   |



## Hay Tedders

Improve feed quality and dry-down time with a hay tedder. They provide thorough conditioning and even distribution in all types of hay.

| MODEL  | WORKING WIDTH     | MINIMUM PTO HP  | TRANSPORT WIDTH  | # OF ROTORS |
|--------|-------------------|-----------------|------------------|-------------|
| TD1316 | 16.16 ft (5 m)    | 20 hp (15 kW)   | 9.33 ft (2.85 m) | 4           |
| TD3418 | 18.16 ft (5.54 m) | 35 hp (26.1 kW) | 9.2 ft (2.79 m)  | 4           |
| TD3427 | 26.5 ft (8.08 m)  | 55 hp (41 kW)   | 11.5 ft (3.51 m) | 6           |

## Bale Spears

Round or square, whatever the job, there is a Frontier bale spear up to the task. Choose from a wide range of single- and triple-tine models to move and stack bales quickly and easily.



| MODEL  | BALE QUANTITY / SIZE                | BALE WEIGHT                                                                     | LOADER SERIES / CARRIER / HITCH                          |
|--------|-------------------------------------|---------------------------------------------------------------------------------|----------------------------------------------------------|
| AB11D  | 1 Large Round Bale                  | 2,000 lb. (907.2 kg)                                                            | 600 and 700 Series John Deere Quick-Attach Loaders       |
| AB11E  | 1 Large Round Bale                  | 2,000 lb. (907.2 kg)                                                            | 300, 400, and 500 Series John Deere Quick-Attach Loaders |
| AB11G  | 1 Large Round Bale                  | 2,000 lb. (907.2 kg)                                                            | 500 and 600 Series Loaders with Global Carrier           |
| AB12D  | 1 Large Round Bale or Square Bale   | Round Bale: 2,500 lb. (1,134 kg)<br>Square Bale: 2,000 lb. (907.2 kg)           | 600 and 700 Series John Deere Quick-Attach Loaders       |
| AB12E  | 1 Large Round Bale or Square Bale   | Round Bale: 2,500 lb. (1,134 kg)<br>Square Bale: 2,000 lb. (907.2 kg)           | 300, 400, and 500 Series John Deere Quick-Attach Loaders |
| AB12G  | 1 Large Round Bale or Square Bale   | Round Bale: 2,500 lb. (1,134 kg)<br>Square Bale: 2,000 lb. (907.2 kg)           | 500 Series Loaders with Global Carrier                   |
| AB13D  | 1 Large Round Bale                  | 2,500 lb. (1,134 kg)                                                            | 600 and 700 Series John Deere Quick-Attach Loaders       |
| AB13E  | 1 Large Round Bale                  | 2,500 lb. (1,134 kg)                                                            | 300, 400, and 500 Series John Deere Quick-Attach Loaders |
| AB13G  | 1 Large Round Bale                  | 2,500 lb. (1,134 kg)                                                            | 500 Series Loaders with Global Carrier                   |
| AB14G  | 2 Round Bales or 1 Square Bale      | 2 Round Bales: 2000 lb. (907.2 kg) each<br>1 Square Bale: 2500 lb. (1134 kg)    | 500 Series Loaders with Global Carrier                   |
| AB14K  | 2 Round Bales or 1 Square Bale      | 2 Round Bales: 2,000 lb. (907.2 kg) each<br>1 Square Bale: 2,500 lb. (1,134 kg) | 600 and 700 Series Loaders with Global Cat. 2            |
| HS2001 | 1 Large Round Bale                  | 2,200 lb. (997.9 kg)                                                            | Cat. 1 and 2, 3-Point Hitch                              |
| HS2002 | 1 Large Round Bale or Square Bale   | 3,000 lb. (1,360.8 kg)                                                          | Cat. 2 and 3, 3-Point Hitch                              |
| HS2003 | 1 Large Round Bale or Square Bale   | 3,000 lb. (1,360.8 kg)                                                          | Cat. 2 and 3, 3-Point Hitch                              |
| HS2004 | 1 Large Round Bale or 2 Square Bale | 4,000 lb. (1,814.4 kg)                                                          | Cat. 2 and 3, 3-Point Hitch                              |

## Round-Bale Huggers

Don't lose volume or nutritional value while moving large round bales. Treat regular or silage bales carefully using the gentle-grasping round-bale hugger.



| MODEL | BALE CAPACITY  | BALE DIAMETER      | LOADER SERIES / CARRIER                     |
|-------|----------------|--------------------|---------------------------------------------|
| AH11G | 1 Wrapped Bale | 3–6 ft (0.9–1.8 m) | 500 and 600 Series Loaders / Global Carrier |

# Livestock and Equine Equipment



## Sprayers

Frontier's 3-point-mounted sprayers are perfect for spraying pastures, fields, road ditches, fence rows, or specialty crops. Sizes to fit virtually all operations.

| MODEL  | WORKING WIDTH                                                                                | TANK CAPACITY    | OPERATING WEIGHT <sup>1</sup>       | HITCH                                            |
|--------|----------------------------------------------------------------------------------------------|------------------|-------------------------------------|--------------------------------------------------|
| LS2004 | Boom: 10 ft (3 m)<br>Boom: 12.5 ft (3.8 m)<br>Boomless: 24 ft (7.3 m)                        | 45 gal. (170 L)  | 496–513 lb.<br>(225–232.7 kg)       | Limited Cat 1 and Cat. 1 with quick-hitch        |
| LS2006 | Boom: 12.5 ft (3.8 m)<br>Boom: 18 ft (5.5 m)<br>Boomless: 24 ft (7.3 m)                      | 60 gal. (227 L)  | 651–793 lb.<br>(295.3–359.7 kg)     | Cat. 1 with quick-hitch                          |
| LS2011 | Boom: 18 ft (5.5 m)<br>Boom: 24 ft (7.3 m)<br>Boom: 30 ft (9.4 m)<br>Boomless: 30 ft (9.4 m) | 110 gal. (416 L) | 1,229–1,450 lb.<br>(557.5–657.7 kg) | Cat. 1 or 2 (with optional kit) with quick-hitch |
| LS2015 | Boom: 18 ft (5.5 m)<br>Boom: 24 ft (7.3 m)<br>Boom: 30 ft (9.4 m)<br>Boomless: 30 ft (9.4 m) | 150 gal. (568 L) | 1,585–1,806 lb.<br>(718.9–819.2 kg) | Cat. 2 with quick-hitch                          |

**You, John Deere, and Frontier. Let's work together.**

<sup>1</sup>Weight estimated with water. Properly ballasted tractor required for lifting and operation. Weight also depends on configuration.

## Manure Forks

Move manure or clean up hay with a Frontier manure fork.



| MODEL | DESCRIPTION                   | LOADER SERIES / CARRIER |
|-------|-------------------------------|-------------------------|
| AM20F | 50 in. (127 cm) Manure Fork   | 100 Series              |
| AM20F | 60 in. (152.4 cm) Manure Fork | 100, 200, 300 Series    |

## Chain-Unloading Manure Spreaders

Spreading manure is both cost-effective and efficient with a chain-unloading manure spreader. It spreads material evenly to help maximize nutrient value.



| MODEL   | HEAPED LEVEL CAPACITY  | MINIMUM TRACTOR WEIGHT | DRIVE SYSTEM  | HITCH     |
|---------|------------------------|------------------------|---------------|-----------|
| MS1102G | 31.11 cu ft (0.88 m³)  | 961 lb. (435.9 kg)     | Ground driven | Pull-Type |
| MS1105G | 62.22 cu ft (1.76 m³)  | 2,176 lb. (987.0 kg)   | Ground driven | Pull-Type |
| MS1108G | 99.56 cu ft (2.82 m³)  | 2,851 lb. (1,293.2 kg) | Ground driven | Pull-Type |
| MS1108  | 99.56 cu ft (2.82 m³)  | 3,282 lb. (1,488.7 kg) | PTO driven    | Pull-Type |
| MS1112  | 155.56 cu ft (4.40 m³) | 4,547 lb. (2,062.5 kg) | PTO driven    | Pull-Type |
| MS1117  | 217.78 cu ft (6.17 m³) | 5,670 lb. (2,571.9 kg) | PTO driven    | Pull-Type |
| MS1223  | 292.45 cu ft (8.28 m³) | 7,742 lb. (3,511.7 kg) | PTO driven    | Pull-Type |
| MS1227  | 336 cu ft (9.51 m³)    | 9,068 lb. (4,113.2 kg) | PTO driven    | Pull-Type |

## Pro Finishers

Riding arena surfaces need to be free of debris and have low compaction to reduce impact and concussion on joints. Frontier Pro Finishers help ensure a consistent, safe, and healthy riding surface, whatever the riding discipline and requirements may be.



| MODEL  | OVERALL WIDTH   | ENGINE HP               | HITCH          |
|--------|-----------------|-------------------------|----------------|
| PF5054 | 54 in. (137 cm) | 18–35 hp (13.4–26.1 kW) | Cat. 1 Limited |
| PF5072 | 72 in. (183 cm) | 35–50 hp (26.1–37.3 kW) | Cat. 1         |
| PF5096 | 96 in. (244 cm) | 40–90 hp (29.8–67.1 kW) | Cat. 1 and 2   |



### Inline Bale Wrapper

Protect silage bales from harsh weather and preserve feed value with inline bale wrappers.

| MODEL  | BALE CAPACITY DIAMETER     | WRAPPING CAPACITY |
|--------|----------------------------|-------------------|
| LW1166 | 5–6 ft (1.52–1.83 m) round | 120 bales / hr    |



### 3-Point-Bale Unroller

Transport large round bales effortlessly with a 3-point-bale unroller. Use the hydraulic bale unroller to haul and unroll round bales for feeding.

| MODEL  | DESCRIPTION         | BALE CAPACITY        | HITCH        |
|--------|---------------------|----------------------|--------------|
| BU1060 | 3-Pt.-Bale Unroller | 2,000 lb. (907.2 kg) | Cat. 1 and 2 |

## FRONTIER

### Quick Hitch



- Provides easy hookup for most Category 1 implements.
- Built with tubular, box-welded steel for longer life.
- Handles the increased lift capacity of today's high-performance tractors.
- Fits all 1-3E Series John Deere tractors.
- Designed to meet ASABE AD11001 Standard for Category 1 quick hitches.

Find this product and many more at [Shop.Deere.com](http://Shop.Deere.com) or [Shop.Deere.ca](http://Shop.Deere.ca)



# Snow Removal Equipment



## 3-Point Snow Blowers

Move snow out of the way so you can get on with your work with a powerful 3-point snow blower. These blowers are the ideal size for large-property and commercial operations, clearing yards, parking lots, driveways, and sidewalks with ease.



| MODEL   | WORKING WIDTH      | PTO HP                     | HITCH        | TYPE               |
|---------|--------------------|----------------------------|--------------|--------------------|
| SB1148  | 48 in. (121.9 cm)  | 16–35 hp (11.9–26.1 kW)    | Cat. 1       | Rear 3-Point Hitch |
| SB1154  | 54 in. (137.2 cm)  | 16–35 hp (11.9–26.1 kW)    | Cat. 1       | Rear 3-Point Hitch |
| SB1164  | 64 in. (162.6 cm)  | 20–50 hp (14.9–37.3 kW)    | Cat. 1       | Rear 3-Point Hitch |
| SB1164P | 64 in. (162.6 cm)  | 20–50 hp (14.9–37.3 kW)    | Cat. 1       | Pull-Type          |
| SB1174  | 74 in. (188.0 cm)  | 30–45 hp (22.4–33.5 kW)    | Cat. 1 and 2 | Rear 3-Point Hitch |
| SB1174P | 74 in. (188.0 cm)  | 25–65 hp (18.6–48.5 kW)    | Cat. 1 and 2 | Pull-Type          |
| SB1184  | 84 in. (213.4 cm)  | 40–80 hp (29.8–59.7 kW)    | Cat. 1 and 2 | Rear 3-Point Hitch |
| SB1194  | 94 in. (238.8 cm)  | 40–80 hp (29.8–59.7 kW)    | Cat. 2       | Rear 3-Point Hitch |
| SB1274  | 74 in. (188.0 cm)  | 35–80 hp (26.1–59.7 kW)    | Cat. 1 and 2 | Rear 3-Point Hitch |
| SB1280  | 80 in. (203.2 cm)  | 35–80 hp (26.1–59.7 kW)    | Cat. 1 and 2 | Rear 3-Point Hitch |
| SB1388  | 88 in. (223.5 cm)  | 55–85 hp (41–63.4 kW)      | Cat. 2       | Rear 3-Point Hitch |
| SB1388R | 88 in. (223.5 cm)  | 55–85 hp (41–63.4 kW)      | Cat. 2       | Rear 3-Point Hitch |
| SB1392R | 92 in. (233.7 cm)  | 75–125 hp (55.9–93.2 kW)   | Cat. 2 and 3 | Rear 3-Point Hitch |
| SB1308R | 98 in. (248.9 cm)  | 100–150 hp (74.6–111.9 kW) | Cat. 2 and 3 | Rear 3-Point Hitch |
| SB1309R | 104 in. (264.2 cm) | 100–150 hp (74.6–111.9 kW) | Cat. 2 and 3 | Rear 3-Point Hitch |

You, John Deere, and Frontier. Let's work together.



## Front-Mounted Snow Blowers

Power through deep snowdrifts with front-mount snow blowers. Front-mounting provides greater visibility and reduces repetitive movements.

| MODEL               | WORKING WIDTH     | ENGINE HP               | MOUNT TYPE     |
|---------------------|-------------------|-------------------------|----------------|
| SB2164 <sup>1</sup> | 64 in. (163 cm)   | 25–36 hp (18.6–26.8 kW) | Loader Mount   |
| SB2176 <sup>2</sup> | 76 in. (193 cm)   | 35–56 hp (26.1–41.8 kW) | Loader Mount   |
| SB1280F             | 80 in. (203.2 cm) | 40–75 hp (29.8–55.9 kW) | Subframe Mount |



## Snow Pushes

The snow push is a fast, simple option for moving snow away from buildings, fences, and hard-to-reach areas.

| MODEL    | WORKING WIDTH                    | LOADER SERIES                                                                                                                  |
|----------|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| AS10F    | 48 or 60 in. (121.9 or 152.4 cm) | 48 in.: 100 and 200 Series John Deere Quick-Attach Loaders<br>60 in.: 100, 200, and 300 Series John Deere Quick-Attach Loaders |
| AS10H-6  | 73.75 in. (187.3 cm)             | 300 and 400 Series John Deere Quick-Attach Loaders                                                                             |
| AS10H-7  | 85.75 in. (217.8 cm)             | 300 and 400 Series John Deere Quick-Attach Loaders                                                                             |
| AS10H-8  | 97.75 in. (248.3 cm)             | 300 and 400 Series John Deere Quick-Attach Loaders                                                                             |
| AS11E-8  | 98 in. (248.9 cm)                | 300, 400, and 500 Series John Deere Quick-Attach Loaders                                                                       |
| AS11E-8  | 110 in. (279.4 cm)               | 300, 400, and 500 Series John Deere Quick-Attach Loaders                                                                       |
| AS11E-10 | 119 in. (303.5 cm)               | 300, 400, and 500 Series John Deere Quick-Attach Loaders                                                                       |



<sup>1</sup>The SB2164 Front-Mount Snow Blower uses the HP2025 Hydraulic Power Pack.

<sup>2</sup>The SB2176 Front-Mount Snow Blower uses the HP2134 Hydraulic Power Pack.

Front Blades

For small snow removal chores, front blades are a dependable solution. Curved blade edges roll snow rather than pushing it for smooth, easy moving.



| MODEL | WORKING WIDTH                                   | LOADER SERIES                                            |
|-------|-------------------------------------------------|----------------------------------------------------------|
| AF10F | 60 in. (152.4 cm)                               | 100 and 200 Series John Deere Quick-Attach Loaders       |
| AF11E | 72 or 84 in. (182.9 or 213.4 cm)                | 300, 400, and 500 Series John Deere Quick-Attach Loaders |
| AF11G | 84 or 96 in. (213.4 or 243.8 cm)                | 500 and 600 Series Loaders with Global Carrier           |
| AF12D | 108 in. (274.3 cm)                              | 600 and 700 Series John Deere Quick-Attach Loaders       |
| AF12G | 96, 108, or 120 in. (243.8, 274.3, or 304.8 cm) | 500 and 600 Series Loaders with Global Carrier           |

Tractor-Mounted Front Blade


Clear snow obstacles with this reversed blade, which mounts directly to the tractor frame. With hydraulic width adjustment up to 10 feet (3 meters), our expandable front snow blade also features durable, cold-resistant hydraulic hoses.



| MODEL | WORKING WIDTH                                           | TRACTOR HP              | MOUNT TYPE             |
|-------|---------------------------------------------------------|-------------------------|------------------------|
| AF13E | 77 in. (195.6 cm) minimum<br>125 in. (317.5 cm) maximum | 45–75 hp (33.5–55.9 kW) | Tractor Subframe Mount |

You, John Deere, and Frontier. Let’s work together.

# Material Handling Equipment

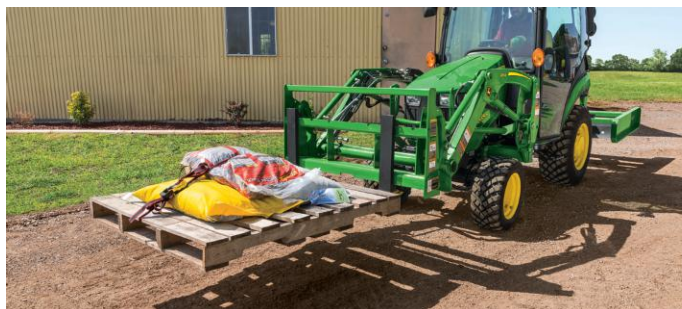

## Pallet Forks

Don't let heavy objects weigh down your workday. With Frontier pallet forks, you can lift pallets, load lumber, move bulky material, or clear construction sites quickly and efficiently.

| MODEL | DESCRIPTION                                                | TINE CAPACITY           | LOADER SERIES / CARRIER                                       |
|-------|------------------------------------------------------------|-------------------------|---------------------------------------------------------------|
| AP10F | 36 in. (91.4 cm)<br>Fixed-Tine Pallet Fork                 | 900 lb. (408.2 kg)      | 100 Series John Deere Quick-Attach Loaders                    |
| AP10F | 42 in. (106.7 cm)<br>Fixed-Tine Pallet Fork                | 2,000 lb. (907.2 kg)    | 100 Series John Deere Quick-Attach Loaders                    |
| AP11F | 42 in. (106.7 cm)<br>Fixed-Tine Pallet Fork                | 2,000 lb. (907.2 kg)    | 100, 200, and 300 Series John Deere Quick-Attach Loaders      |
| AP12D | 42 or 48 in. (106.7 or 121.9 cm)<br>Fixed-Tine Pallet Fork | 5,500 lb. (2,494.8 kg)  | 600 and 700 Series Quick-Attach Loaders                       |
| AP12F | 42 or 48 in. (106.7 or 121.9 cm)<br>Fixed-Tine Pallet Fork | 3,750 lb. (1,701 kg)    | 200, 300, 400, and 500 Series John Deere Quick-Attach Loaders |
| AP12G | 42 or 48 in. (106.7 or 121.9 cm)<br>Fixed-Tine Pallet Fork | 5,500 lb. (2,494.8 kg)  | 500 and 600 Series Loaders with Global Carrier                |
| AP12K | 48 in. (121.9 cm)<br>Fixed-Tine Pallet Fork                | 10,000 lb. (4,535.9 kg) | Global Carrier—Cat. 2                                         |
| AP13D | 42 or 48 in. (106.7 or 121.9 cm)<br>Floating Pallet Fork   | 5,500 lb. (2,494.8 kg)  | 600 and 700 Series John Deere Quick Attach Loaders            |
| AP13F | 42 or 48 in. (106.7 or 121.9 cm)<br>Floating Pallet Fork   | 3,750 lb. (1,701 kg)    | 200, 300, 400, and 500 Series John Deere Quick-Attach Loaders |
| AP13G | 42 or 48 in. (106.7 or 121.9 cm)<br>Floating Pallet Fork   | 5,500 lb. (2,494.8 kg)  | 500 and 600 Series Loaders with Global Carrier                |

## Mechanical Grapple

The mechanical grapple was designed to meet the needs of those rural lifestyle customers that want a loader grapple, but don't have loader third function capabilities.



| MODEL | WORKING WIDTH     | LIFT CAPACITY        | LOADER COMPATIBILITY |
|-------|-------------------|----------------------|----------------------|
| MG20F | 54 in. (137.2 cm) | 1,200 lb. (544.3 kg) | 120R, 220R, 300E     |

## Pallet Fork Grapples<sup>1</sup>

A great tool for moving lots of materials that are awkward to handle. From piles of brush to firewood to lengths of pipe and more, a pallet fork grapple can help make work simpler and easier.



| MODEL | PALLET FORK COMPATIBILITY      |
|-------|--------------------------------|
| PG11  | AP10F and AP11F Series         |
| PG12  | AP11G, AP12F, and AP12G Series |

## Root Grapples<sup>1</sup>

Get rid of unwanted brush, rocks, logs, and other debris with a root grapple. It's the perfect tool for storm cleanup or clearing land of rubble and debris.



| MODEL | WORKING WIDTH     | LOADER SERIES / CARRIER                                  |
|-------|-------------------|----------------------------------------------------------|
| AV20F | 53 in. (134.6 cm) | 100, 200, and 300 Series John Deere Quick-Attach Loaders |
| AV20H | 60 in. (152.4 cm) | 300R and 320R John Deere Quick-Attach Loaders only       |
| AV20E | 62 in. (157.5 cm) | 400 and 500 Series John Deere Quick-Attach Loaders       |
| AV20G | 77 in. (195.6 cm) | 500 and 600 Series Loaders with Global Carrier           |
| AV55H | 64 in. (162.6 cm) | 300 Series John Deere Quick-Attach Loaders               |
| AV56E | 72 in. (183 cm)   | 400 Series John Deere Quick-Attach Loaders               |
| AV56G | 72 in. (183 cm)   | 500 and 600 Series Loaders with Global Carrier           |
| AV57G | 84 in. (213.4 cm) | 500 and 600 Series Loaders with Global Carrier           |

<sup>1</sup>Loader third function hydraulics required.



## Debris Grapples<sup>1</sup>

Grounds maintenance workers and demolition crews can clean up worksites quickly and efficiently with a powerful debris grapple. The rugged construction enables operators to clutch heavy or bulky items more easily.

| MODEL | WORKING WIDTH     | LOADER SERIES / CARRIER                                   |
|-------|-------------------|-----------------------------------------------------------|
| AD11H | 60 in. (152.4 cm) | 320R and 400 Series John Deere Quick-Attach Loaders       |
| AD11E | 72 in. (182.9 cm) | 320R, 400, and 500 Series John Deere Quick-Attach Loaders |
| AD12G | 76 in. (193.0 cm) | 500 and 600 Series Loaders with Global Carrier            |



## Rock Buckets

Clear your land of rocks while leaving the soil in place with a rock bucket. They sift out soil while picking up heavy rocks or large debris.

| MODEL | WORKING WIDTH     | LOADER SERIES / CARRIER                                  |
|-------|-------------------|----------------------------------------------------------|
| AR10H | 55 in. (138.7 cm) | 300 and 400 Series John Deere Quick-Attach Loaders       |
| AR10E | 66 in. (167.6 cm) | 300, 400, and 500 Series John Deere Quick-Attach Loaders |
| AR10E | 75 in. (190.5 cm) | 300, 400, and 500 Series John Deere Quick-Attach Loaders |
| AR10G | 75 in. (190.5 cm) | 500 and 600 Series Loaders with Global Carrier           |

## 4-in-1 Buckets<sup>1</sup>

Move loose material, clear logs and debris, or grade and smooth driveways with the versatile 4-in-1 bucket. Heavy-duty steel hinges resist bending, providing long wear life, and the sturdy bucket clamp seals shut to secure material during transport.



| MODEL | WORKING WIDTH                                    | LOADER SERIES / CARRIER                                      |
|-------|--------------------------------------------------|--------------------------------------------------------------|
| AY11F | 53 in. (134.6 cm)                                | 100 and 200 Series, and 300E John Deere Quick-Attach Loaders |
| AY11H | 60 in. (152.4 cm)                                | 320R and 400 Series John Deere Quick-Attach Loaders          |
| AY11E | 72 in. (182.8 cm)                                | 320R, 400, and 500 Series John Deere Quick-Attach Loaders    |
| AY12G | 72, 78, or 84 in.<br>(182.9, 198.1, or 213.4 cm) | 500 and 600 Series Loaders with Global Carrier               |

## Loader Carrier Adapters

Want to upgrade to a John Deere compact tractor but have attachments with different mounting styles? Frontier loader carrier adapters make it easy to connect and get to work—no matter what you've got.



| MODEL | LIFT CAPACITY          | LOADER SERIES / CARRIER                                                                  |
|-------|------------------------|------------------------------------------------------------------------------------------|
| SA20F | 1,500 lb. (680.4 kg)   | 100 and 200 Series, and 300E John Deere Quick-Attach Loaders to Skid Steer Carrier       |
| SA21E | 4,000 lb. (1,814.4 kg) | 300R, 320R, and 400 and 500 Series John Deere Quick-Attach Loaders to Skid Steer Carrier |
| SA21G | 4,000 lb. (1,814.4 kg) | 500 and 600 Series Loaders with Global Carrier to Skid Steer Carrier                     |
| SA22D | 4,000 lb. (1,814.4 kg) | 600 and 700 Series John Deere Quick-Attach Loaders to Skid Steer Carrier                 |
| DA21G | 4,000 lb. (1,814.4 kg) | 500 and 600 Series Loaders with Global Carrier to John Deere Quick-Attach Carrier        |
| GA21E | 4,000 lb. (1,814.4 kg) | 440R and 500 Series Quick-Attach Loaders to Global Carrier                               |
| GA22D | 5,000 lb. (2,268 kg)   | 600 and 700 Series Quick-Attach Loaders to John Deere Quick-Attach Carrier               |

**You, John Deere, and Frontier. Let's work together.**

<sup>1</sup>Loader third function hydraulics required.



## Loader-Mount Rotary Brooms

Sweep walks, driveways, parking lots, and other paved areas with a loader-mount rotary broom. These brooms can save valuable time in commercial applications.

| MODEL  | WORKING WIDTH     | LOADER SERIES / CARRIER                                    |
|--------|-------------------|------------------------------------------------------------|
| SW2160 | 60 in. (152.4 cm) | 300R and 320R John Deere Quick-Attach Loaders              |
| SW2172 | 72 in. (182.9 cm) | 300R, 320R, and 400 Series John Deere Quick-Attach Loaders |
| SW2184 | 84 in. (213.4 cm) | 400 Series John Deere Quick-Attach Loaders                 |



## Hydraulic Power Packs

A Frontier hydraulic power pack powers several loader-mount implements to remove snow, dirt, and debris, or take on other tough challenges.

| MODEL  | HYDRAULIC CAPACITY                             | PTO HP                  |
|--------|------------------------------------------------|-------------------------|
| HP2025 | 16 gpm at 2700 psi (60.6 L/min. at 18,615 kPa) | 25–35 hp (18.6–26.1 kW) |
| HP2134 | 20 gpm at 3000 psi (75.7 L/min. at 20,684 kPa) | 35–56 hp (26.1–41.8 kW) |

# TIPS NOTEBOOK

## Like an expert in your pocket.

At home or in the field, find our ever-growing collection of more than 100 tips, videos, and collective wisdom about how to get all kinds of jobs done around your place. Brought to you by John Deere and Frontier.

We're in this together.

For more videos and tips, go to [tipsnotebook.deere.com](https://tipsnotebook.deere.com)

Send your project idea to [Tipldea@JohnDeere.com](mailto:Tipldea@JohnDeere.com).  
The world will be better for it.



[tipsnotebook.deere.com](https://tipsnotebook.deere.com)





BuyFrontier.com  
BuyFrontier.ca

7458100  
(26/03)

**FRONTIER**™