

# ROUND BALERS BROCHURE

*1 Series, VM, VR, and CR Balers*



JOHN DEERE





# The Right Baler. The Right Choice.

## Productive. Efficient. Consistent.

Round balers built to a specific standard. Yours. The John Deere lineup reflects the way you work. High-capacity pickups chomp through the biggest windrows, while Weave Automation helps to reduce operator input while delivering consistently shaped bales. Bale Documentation in John Deere Operations Center™ tracks bale counts, moisture, and field performance automatically—no extra steps required. Whether you're putting up dry hay or silage, you can choose the pickup, bale size, and technology options that fit your operation—backed by forage experts who know what it takes to get the job done right.



## FIND THE PERFECT FIT FOR YOUR OPERATION.

1 SERIES ROUND BALERS ... VM & VR ROUND BALERS ... CR WRAPPING BALERS

### Compare Our Balers-

| MODELS                  | DRY HAY | SILAGE | BALEAGE | WRAPPING | OPERATION                    |
|-------------------------|---------|--------|---------|----------|------------------------------|
| 1 Series                |         |        |         |          | Dry hay                      |
| 1 Series Silage Special |         |        |         |          | Silage first operations      |
| VM                      |         |        |         |          | Handle a wide range of crops |
| VR                      |         |        |         |          | High output producers        |
| CR                      |         |        |         |          | Silage first operations      |
| Suitable  Preferred     |         |        |         |          |                              |

### 1 SERIES ROUND BALERS

Field-proven, productivity-tested high-capacity baling for consistent, optimally-shaped dense bales, customized for size. Performance is maximized for dry hay with silage option available. Built for wet hay, the Silage Special configuration available on R Spec balers, is designed to handle high-moisture forage like silage with enhanced durability and crop flow. Supporting your productivity, select 1 Series Balers offer you a full suite of Baler Automation, including Gate, Speed and Weave Automation.





Our focus is on you and your productivity.  
*Anything less and we wouldn't be John Deere.*

---

## Table of Contents

|       |                            |
|-------|----------------------------|
| 2-3   | Baler Overview             |
| 4-7   | 1 Series Balers            |
| 8-9   | Technology & Automation    |
| 10-11 | Connectivity & Convenience |
| 12-13 | VM & VR Balers             |
| 14-15 | CR Wrapping Balers         |
| 16-17 | Parts & Attachments        |
| 18-19 | Support & Service          |
| 20-23 | Specifications             |

---

### VM BALERS

Built for high-capacity baling of silage. Handle a wide range of crops with confidence and consistency while adjusting bale size to your needs. A basic foundation of heavy-duty components support your productivity, season after season.

### VR BALERS

For high-output silage producers looking for more power than the VM for tougher conditions. Speed up production of premium-shaped maximum density bales with a wide pickup, endless belts, and the fastest bale ejection in our round baler line up.

### CR WRAPPING BALERS

High-density performance for silage first operations. Wrap, seal & protect bales in a seamless one-driver process. Preserve nutrition and minimize spoilage. Rapid wrapping arms and available precutter makes it easier to turn out bales for enhanced productivity.



WHY TO CHOOSE A

# 1 Series Round Baler.

## INCREASED PRODUCTIVITY

Get 33% more capacity over MegaWide™ Pickup. The High-Capacity Pickup option<sup>1</sup> increases potential bales per day and enables you to clear plugs from the cab. The result is smooth operation without costly delays and a baler that's productive for longer periods of time.

## IMPROVED DISPLAY

Leverage the optional 8-inch (20cm) color HD touchscreen display to capture important data such as weight, bale count, drop location, moisture levels, and field by field yield. Once documented, all your data transfers seamlessly into John Deere Operations Center™ through your JDLink™ Modem.<sup>2</sup>

## BALER AUTOMATION

With features like Gate Automation, Speed Automation, and Weave Automation,<sup>3</sup> it's never been easier to create a square shouldered bale. Simply place the windrow between the tires of the tractor and let the baler do the work. Get more done with less operator input - and fewer missteps.

## SMOOTH OPERATIONS

Use feature options like Net Lift Assist and Net Lighting for easier and faster Net Wrap installation.







## ***By The Numbers***

**80<sup>+</sup> MORE  
BALES<sup>4</sup>**

PER DAY WITH HIGH-CAPACITY PICKUP<sup>2</sup>

33% increase over MegaWide™ Pickup

**20% FASTER  
GATE SPEED<sup>4</sup>**

INCREASING EFFICIENCY

**3 PICKUP  
OPTIONS**

MEGAWIDE™ CLASSIC, MEGAWIDE™ PLUS,  
HIGH-CAPACITY

<sup>1</sup>Available on John Deere R Spec round balers only.

<sup>2</sup>Activation/subscription required. Some additional accessories and/or components may be required. JDLink requires a cellular data connection to transfer information from machine to JDLink website. Consult your John Deere dealer for coverage availability.

<sup>3</sup>Available as a factory option for 461M, 461R, 561M, and 561R round balers.

<sup>4</sup>Compared to prior John Deere models.



# Choose Your Baler.

Start with your desired bale size and the tractor you have. Then consider: What challenges do I want to address? Meaning, what level of technology is right for me?

*Here's an overview of the differences between our 1 Series Balers.*

## BALE SIZES & MODELS

 **4x5 Round Bales**  
451E, 451M, 451R

 **5x5 Round Bales**  
551M

 **4x6 Round Bales**  
461M, 461R

 **5x6 Round Bales**  
561M, 561R



### E Spec

The E handles dry hay only and maintains peak efficiency and productivity while keeping things simple for the operator.

These balers offer our MegaWide™ Classic Pickup.



### M Spec

The M handles dry hay and wet, heavy silage with ease. This is our bread-and-butter baler, providing what you need with some very useful advanced technology.

These balers offer our MegaWide Plus Pickup and the option to add Weave Automation.<sup>1</sup>



### R Spec

The R can handle dry hay and silage and includes a high-capacity pickup option with or without a precutter. Highly productive, the R Spec Round Balers also feature heavy-duty components for less wear and tear. Optional Weave Automation<sup>1</sup> allows for seamless implement control and full windrow coverage with reduced operator input. This is the most advanced baler we offer. It includes a two-year warranty to protect your investment.<sup>2</sup>

**Advanced and versatile—with three spec levels.**





## MegaWide™ Classic Pickup

Available on the E Spec 4x5 baler, MegaWide™ Classic Pickup delivers a 71 in (180 cm) pickup range and is available for crop types that may not require precutting.

## MegaWide™ Plus Pickup

Found on our M Spec Round Balers, MegaWide Plus Pickup gathers more crop and handles higher-volume windrows.<sup>3</sup> The result is easier days in the field and higher productivity.

## High-Capacity Pickup

R Spec Round Baler Models feature a High-Capacity Pickup, our highest capacity, most productive pickup yet. It offers a 33% increase over MegaWide Pickup<sup>4</sup> so you can increase your output per day by 80+ bales.<sup>5</sup> Available with or without a precutter—5 ft balers have 20 knives and 4 ft balers have 14 knives.

## Hydraulic Drop Floor

Our innovative self-clearing hydraulic drop-floor system on the High-Capacity Pickup allows you to clear plugs from your cab.<sup>4</sup> Instead of a typical friction clutch, these balers use a cut out clutch and heavy duty components.

## High-Capacity Precutters

Available on R Spec machines with the High-Capacity Pickup. Gain a more efficient way to handle processed hay. Precutters improve bale density and feed digestibility, especially for TMR systems. Reduce the need for tub grinding and maintain feed quality. 5 ft balers have 20 knives, 4 ft balers have 14 knives.

<sup>1</sup> Available as a factory install option on 461M, 461R, 561M, 561R Round Balers.

<sup>2</sup> Up to two years or 12,000 bales, whichever comes first. Other terms, conditions, exclusions, and warranty limitations apply. See your John Deere dealer or visit [JohnDeere.com](http://JohnDeere.com) or [JohnDeere.ca](http://JohnDeere.ca) for details.

<sup>3</sup> Compared to MegaWide Classic Pickup.

<sup>4</sup> Available on R Spec Balers only.

<sup>5</sup> Compared to previous models.



# Technology makes your workday easier.

You need machines that make your life easier, not harder. That's why we've kept our round balers simple and intuitive to operate. Here are some highlights of the technology we're proud to offer.



## HIGHLIGHTS

### G5e Display

You'll find a full-color, 8-in HD G5e touchscreen display monitor in select round balers. Simply key in a function and you're on to the next expertly shaped bale. We offer "how-to" videos on [JohnDeere.com](http://JohnDeere.com) and [JohnDeere.ca](http://JohnDeere.ca) for the features enabled by this display.

### Bale Scale and Moisture Sensor

Avoid spoilage risks by monitoring your moisture levels. You can also monitor the size and weight of your bales, so you can make calculated adjustments to get the best shape and nutrient dense bales possible. You can then use field-by-field data in John Deere Operations Center™ to make economic decisions.

### Bale Documentation

John Deere Bale Documentation turns every bale into a data point—capturing weight, moisture, and location automatically through the Operations Center™. Replace guesswork with near real-time insights for smarter decisions about storage, feeding, resale, and field management. Maintain consistent records, improve crop planning, and implement variable-rate fertilizer strategies.





| Model | G5e Display | Bale Scale | Moisture Sensor | Bale Documentation | Baler Automation | Weave Automation | Rear Camera |
|-------|-------------|------------|-----------------|--------------------|------------------|------------------|-------------|
| 451E  | ☐           |            |                 | ☐                  |                  |                  |             |
| 451M  | ☐           | ☐          | ☐               | ☐                  | ☐                |                  |             |
| 451R  | ☐           | ☐          | ☐               | ☐                  | ☐                |                  |             |
| 461M  | ☐           | ☐          | ☐               | ☐                  | ☐                | ☐                |             |
| 461R  | ☐           | ☐          | ☐               | ☐                  | ☐                | ☐                |             |
| 551M  | ☐           | ☐          | ☐               | ☐                  | ☐                |                  |             |
| 561M  | ☐           | ☐          | ☐               | ☐                  | ☐                | ☐                |             |
| 561R  | ☐           | ☐          | ☐               | ☐                  | ☐                | ☐                |             |
| V452M | ☐           |            | ☐               | ☐                  | ☐                |                  | ☐           |
| V452R | ☐           |            | ☐               | ☐                  | ☐                |                  | ☐           |
| V462R | ☐           |            | ☐               | ☐                  | ☐                |                  | ☐           |
| C452R | ☐           | ☐          | ☐               | ☐                  | ☐                |                  | ☐           |
| C462R | ☐           | ☐          | ☐               | ☐                  | ☐                |                  | ☐           |

## ➤ Baler Automation

Baler Automation can improve bale consistency and boost throughput no matter your experience level. Used independently or together, Gate Automation opens and closes the baler after wrapping, Speed Automation stops and restarts tractor movement at each cycle, and Weave Automation steers side-to-side to evenly fill the chamber.

## ➤ Weave Automation

Weave Automation is available on select round balers.<sup>1</sup> Simply place the windrow between the tractor tires and watch it work! This automated hitch system allows a +38-degree swing from left to right, leading to consistent bale shape and less opportunity for dirt and debris to be introduced to the windrow.<sup>2</sup>

## ➤ High-Definition Rear Camera

Keep an eye on the entire baling process. You benefit with greater visibility, a better view in bright or contrasted environments, the ability to see the rear of the baler and the ejected bales on the field behind.

<sup>1</sup>Available as a factory option for 461M, 461R, 561M, and 561R round balers.

<sup>2</sup>Weave Automation enhances feed quality by minimizing contamination of debris introduced by driving over windrows.




# Connectivity and Convenience.

*High-capacity balers are just the start.*

With John Deere connectivity, you get actionable data and insights to make smarter decisions and monitor your equipment. Maintain bale shape and hay quality with Net Wrap. For convenience, rely on Net Wrap Lift Assist and Net Lighting to make your workday (and night) easier.






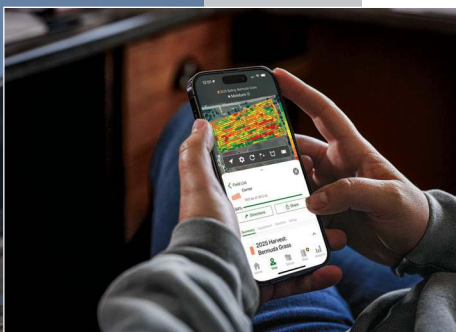

## John Deere Operations Center™

Monitor and gain insights into your machine performance, bale count, moisture and weight, all wrapped into field-by-field yield data through documenting your passes. This information transfers to John Deere Operations Center through the JDLink™ Modem.<sup>1</sup> No USB needed.

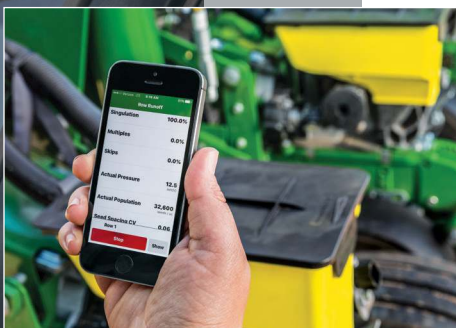

## Equipment Mobile

Keep your equipment ready to go with important details in the app such as maintenance information and instructions, parts information specific to your equipment, and other specifics that are vital to machine health and performance.



## Net Wrap

John Deere offers multiple types of Net Wrap including Cover Edge, Edge to Edge, and B Wrap.



## Net Lift Assist

Safely and easily load Net Wrap. The John Deere Net Lift Assist Kit, designed for a wide range of round balers dating back to the 7 Series, does the heavy lifting for you.



## Net Lighting

Powered by the baler's tail-light harness, keep your Net Wrap area lit up in the dark.

<sup>1</sup>JDLink™ hardware comes standard with the machine. You can turn on JDLink connected service in your John Deere Operations Center™ account for free. JDLink requires a cellular connection to transfer information from machine to Operations Center. Consult your John Deere Dealer for coverage availability.



# VM & VR Round Balers.

V452M • V452R • V462R

*With the right mix of price and performance, our VM model is the perfect option for farms with tougher crop and looking for the precutter option at an M spec level.*

Handle a wide range of crops with confidence and consistency. You benefit from high-capacity feeding plus heavy, rugged components and adjustable bale size.

**VR Balers are purpose-built for high-output producers**, delivering premium bale shape and increased density and power over the VM baler. Wide pickups, fast bale ejection and endless belts drive productivity.

**VM and VR balers—a high-capacity feeding system** lets you bale heavy windrows faster with less risk of plugging. Hydraulic wide drop-floor enables hands-free unplugging. Bale chamber technology boosts efficiency with three powered fixed rolls and two big diameter belt driving rolls. Baler Automation automatically stops the tractor when target bale size is reached and manages the gate cycle.

**Smart Technology leads to smarter decision making** with G5e display, high-definition rear camera, and available moisture sensors.



## By The Numbers

**120 HP**  
(90 KW)

MINIMUM PTO

**7.2ft WIDE PICKUP**

(2.2 M WIDE PICKUP)

**22.45 LB/FT<sup>3</sup> DENSITY**

WITH V452M IN SILAGE



**Built for  
Performance  
Durability  
Density.**



*HIGH-QUALITY*   
**PRECUT BALES**

- ⦿ **High-Capacity Feeding System:**  
High performance 7.2 ft, (2.2m) wide feeders let you bale heavy windrows faster with less risk of plugging.
- ⦿ **Drop-Floor:**  
Hands-free unplugging. The hydraulic, wide drop-floor clears the worst blockages, even those located in front of converging augers.
- ⦿ **Bale Chamber Technology:**  
Three powered fixed rolls and two big diameter belt-driving rolls inside the bale chamber provide high capacity even in very wet silage conditions.
- ⦿ **Baler Automation:**  
Automatically stops your tractor when target bale size is reached and manages the gate cycle.
- ⦿ **Smart Technology:**  
G5e display, high-definition rear camera, available moisture sensors, and bale documentation help to make your workday more productive.





# CR Wrapping Balers.

C452R • C462R

*CR Wrapping Balers—purpose-built for silage-first operations to preserve nutrition and minimize spoilage.*

Wrap, seal, and protect bales in a seamless one-driver process. These are our only balers that allow you to create yield maps and drop locations for each bale in John Deere Operations Center™.

**Actionable data.** Connectivity provides you with data, like total production and average moisture of usable dry matter. This data lets you make better economic decisions. Use yield maps to trigger variable rate fertilization to increase yield or decrease inputs. With the power to know your total cost, performance indicators replace guesswork to support your calculations.

CR Wrapping Balers provide high-density, rapid wrapping arms, and a high-capacity feeding system. Baler Automation automatically stops the tractor when target bale size is reached and manages the gate cycle. With Unplug Assist your tractor automatically stops and disengages the power take off when a plug is detected.











# Get Even More from your Baler.



## Round Baler Wear Parts Box

Make routine maintenance simpler and more convenient with the Round Baler Wear Parts Box. Avoid a trip to the dealer and repair your baler at home with this box containing the 25 most common wear parts on your baler. Parts are available for the 8, 9, 0, and 1 Series Balers. Be prepared for minor maintenance needs and keep your productivity on track!



## GREEN-GARD™

Get in the field even when the forecast isn't ideal. With GREEN-GARD hay preservative, you can bale at up to 30% moisture level. This increase in uptime could be crucial during harvest. Seal in freshness and help prevent mold growth, heating, and spoilage in storage. Safe for use around livestock.



# Strengthen your Baling Operation *with Frontier.*




### Bale Unroller

Frontier Bale Unrollers are a simple way to haul and unroll bales for feeding. Plus, it reduces hay loss during transport.



### Bale Wrapper

Wrap up to 120 bales per hour with the fast-action Frontier bale wrapper. It keeps your bales safe from harsh weather and helps seal in the nutrients for higher-quality feed.

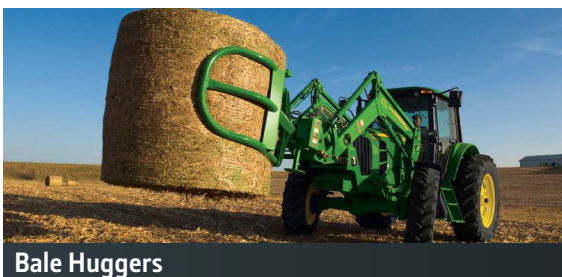

### Bale Huggers

Don't lose volume or nutritional value while moving large round bales. Treat regular or silage bales with care with the gentle-grasping Round-Bale Hugger. Handles wrapped bales from 3 to 6 ft (0.9 to 1.8 m) in diameter.



### Bale Spears

Frontier 3-Point and Loader Mount Bale Spears transport large round or square bales. Choose from a wide range of single- and triple-tine models to get the task done quickly.



### Mowers

Count on Frontier Disc Mowers for reliable hay cutting, field after field. Ruggedly built and equipped with high-end features, they deliver high performance and uptime while keeping costs of operation down.



### Hay Tedders

Thorough conditioning and speedy drydown equals high-quality hay. And for that, reach for a Frontier Hay Tedder to give you even distribution in a wide variety of hay.



### Wheel Rakes

You'll find Frontier Wheel Rakes are perfect for hay producers looking to maximize drying time and shaving a little time off in the field. Our lineup offers options to deliver high performance and tackle nearly any type of terrain.



# SUPPORT AND SERVICE

## JOHN DEERE CONNECTED SUPPORT™

John Deere equipment features technology that can help you resolve maintenance challenges quickly. John Deere Connected Support™ senses potential issues and can alert you promptly – anywhere you are. Your dealer can also receive alerts and, with your permission, connect to your equipment remotely for further diagnostics.

### **With John Deere Connected Support**

#### **You Can:**

- Monitor alerts from your machine remotely
- Monitor engine hours and utilization
- View machine location and get driving directions to the site
- Monitor fuel level and idle time.

#### **Your Dealer Can:**

- Monitor alerts coming from your machine
- Remotely connect to your machine for real-time diagnosis
- Perform software updates from the dealership.

## THE JOHN DEERE DIFFERENCE

Your Round Baler and other John Deere equipment are long-term investments. John Deere understands that and provides more parts and an unrivaled dealer network to support you. We're committed to what we call the John Deere Difference and consists of providing you with:

- The Right Part for Any Budget
- Highly Trained Expert Technicians
- 12 Months Parts & Labor Warranty
- Short & Long Term Financing Options.

## PROTECT YOUR INVESTMENT

John Deere provides one of the best warranties in the business. With PowerGard™ Protection Plan, you can purchase additional protection beyond the normal factory warranty term.

#### **Learn more:**

**US:** [JohnDeere.com/PowerGard](http://JohnDeere.com/PowerGard)

**CA:** [JohnDeere.ca/PowerGard](http://JohnDeere.ca/PowerGard)





## JOHN DEERE FINANCIAL

John Deere Financial offers value no other lender can – a deep understanding of your industry, unmatched equipment expertise, and personalized financial solutions that can be quickly arranged through your dealer at the time of your purchase.

**Learn more:**

**US:** [JohnDeereFinancial.com](http://JohnDeereFinancial.com)

**CA:** [JohnDeereFinancial.ca](http://JohnDeereFinancial.ca)

---

***John Deere Financial has many solutions for your business or personal needs.***

## EQUIPMENT LOANS

Own John Deere equipment with competitive rates, and flexible terms. You can bundle equipment, parts, service, attachments and more on the same note.

## EQUIPMENT LEASES

Preserve your capital, adapt to seasonal workloads, and run more efficiently with the latest John Deere technology.

## MULTI-USE ACCOUNT

Use this account to handle all of your day-to-day purchases including equipment parts, service, attachments, and more. Talk to your dealer about flexible finance offers and payment options designed to meet your seasonal cash flow needs.

## DIGITAL FINANCING

John Deere Financial offers exclusive digital financing tools and services that make it easy to manage your John Deere Financial account anytime, anywhere. Through MyJohnDeere.com or through the MyFinancial app you can access a whole suite of interactive tools including AutoPay, eStatements, and personal finance calculators.





# 1 SERIES SPECIFICATIONS

| MODELS                                |                                                                   | 451E                                                                                                | 451M                                                                                                | 451R                                                                                                                             | 461M                          |
|---------------------------------------|-------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| KEY SPECS                             |                                                                   |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| Belts - other - width                 | 7 in. (178 cm)                                                    | 7 in. (178 cm)                                                                                      | 7 in. (178 cm)                                                                                      | 7 in. (178 cm)                                                                                                                   | 7 in. (178 cm)                |
| Density control                       | Hydraulic                                                         | Hydraulic                                                                                           | Hydraulic                                                                                           | Hydraulic                                                                                                                        | Hydraulic                     |
| Bale size indication                  | Electronic display on monitor                                     | Electronic display on monitor                                                                       | Electronic display on monitor                                                                       | Electronic display on monitor                                                                                                    | Electronic display on monitor |
| BALE                                  |                                                                   |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| SIZE- Diameter                        | 4 x 5 ft 1.2 x 1.5 m                                              | 4 x 5 ft 1.2 x 1.5 m                                                                                | 4 x 5 ft 1.2 x 1.5 m                                                                                | 4 x 5 ft 1.2 x 1.5 m                                                                                                             | 4 x 6 ft 1.2 x 1.8 m          |
| SIZE- Width                           | 46 in. (117 cm)                                                   | 46 in. (117 cm)                                                                                     | 46 in. (117 cm)                                                                                     | 46 in. (117 cm)                                                                                                                  | 46 in. (117 cm)               |
| BALER                                 |                                                                   |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| WEIGHT                                | Shipping - 3,750 lb (1,701 kg)                                    | Shipping dry - 3,820 lb (1,733 kg)<br>Shipping silage - 5,972 lb (2,708 kg)                         | Shipping precut - 8,138 lb (3,691 kg)                                                               | Shipping dry - 6,172 lb (2,800 kg)<br>Shipping silage - 6,568 lb (2,979 kg)                                                      |                               |
| -Gate closed                          | 142 in. (361 cm)                                                  | 142 in. (361 cm)                                                                                    | 142 in. (361 cm)                                                                                    | 146 in. (371 cm)                                                                                                                 |                               |
| -Gate open                            | 179 in. (455 cm)                                                  | 179 in. (455 cm)                                                                                    | 179 in. (455 cm)                                                                                    | 187 in. (475 cm)                                                                                                                 |                               |
| HEIGHT- Gate closed                   | 102 in. (260 cm)                                                  | 102 in. (260 cm)                                                                                    | 102 in. (260 cm)                                                                                    | 110 in. (279 cm)                                                                                                                 |                               |
| HEIGHT- Gate open                     | 128 in. (325 cm)                                                  | 128 in. (325 cm)                                                                                    | 128 in. (325 cm)                                                                                    | 145 in. (368 cm)                                                                                                                 |                               |
| WIDTH- w/ Standard tires              | 89 in. (226cm)                                                    | 89 in. (226cm)                                                                                      | 89 in. (226cm)                                                                                      | 89 in. (226cm)                                                                                                                   |                               |
| -With opt. tires (Hi-Flotation)       | N/A                                                               | 96 in. (244 cm)                                                                                     | 96 in. (244 cm)                                                                                     | 96 in. (244 cm)                                                                                                                  |                               |
| BALE FORMING                          |                                                                   |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| BELTS - OTHER                         | DiamondTough, triple-weave, single-ply belts                      |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| Density control                       | Hydraulic                                                         |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| Bale size indication                  | Not available from factory, available as dealer-installed options | Electronic display on monitor                                                                       |                                                                                                     |                                                                                                                                  |                               |
| MEGAWIDE™ CLASSIC PICKUP              |                                                                   |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| Inside                                | 61 in. (155 cm)                                                   |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| Flare                                 | 71 in. (180 cm)                                                   |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| Bars                                  | 4                                                                 |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| Number of teeth                       | 72                                                                |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| Tooth spacing                         | 2.6 in. (6 cm)                                                    |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| Lift control                          | Adjustable height control                                         |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| Gauge wheels                          | Semi-pneumatic                                                    |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| Stripper diameter                     | 10 in. (25.4 cm)                                                  |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| MEGAWIDE™ PLUS PICKUP                 |                                                                   |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| Inside                                |                                                                   | 61 in. (155 cm)                                                                                     |                                                                                                     | 61 in. (155 cm)                                                                                                                  |                               |
| Flare                                 |                                                                   | 71 in. (180 cm)                                                                                     |                                                                                                     | 71 in. (180 cm)                                                                                                                  |                               |
| Number of middle teeth                |                                                                   | 96                                                                                                  |                                                                                                     | 96                                                                                                                               |                               |
| Number of mega teeth                  |                                                                   | 16                                                                                                  |                                                                                                     | 16                                                                                                                               |                               |
| Gauge wheels                          |                                                                   | Semi-pneumatic                                                                                      |                                                                                                     | Semi-pneumatic                                                                                                                   |                               |
| HIGH-CAPACITY PICKUP                  |                                                                   |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| Type                                  |                                                                   |                                                                                                     | High Capacity and Cutting (HC)                                                                      | MegaWide High Capacity and Cutting (HC)                                                                                          |                               |
| Inside                                |                                                                   |                                                                                                     | 77 in. (196 cm)                                                                                     | 77 in. (196 cm)                                                                                                                  |                               |
| Flare                                 |                                                                   |                                                                                                     | 87 in. (221 cm)                                                                                     | 87 in. (221 cm)                                                                                                                  |                               |
| Number of middle teeth                |                                                                   |                                                                                                     | 120                                                                                                 | 120                                                                                                                              |                               |
| Number of mega teeth                  |                                                                   |                                                                                                     | 8                                                                                                   | 8                                                                                                                                |                               |
| Gauge wheels                          |                                                                   |                                                                                                     | Semi-pneumatic                                                                                      | Semi-pneumatic                                                                                                                   |                               |
| Stripper diameter                     |                                                                   |                                                                                                     | 10 in. (25.4 cm)                                                                                    | 10 in. (25.4 cm)                                                                                                                 |                               |
| WRAPPING SYSTEM                       |                                                                   |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| Twine arms                            | 2                                                                 | 2                                                                                                   | 2                                                                                                   | 2                                                                                                                                |                               |
| Twine ball capacity                   | 4                                                                 | 4                                                                                                   | 8                                                                                                   | 8                                                                                                                                |                               |
| MONITOR                               |                                                                   |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| Gate closed                           | Symbol on monitor                                                 | Symbol on monitor                                                                                   | Symbol on monitor                                                                                   | Symbol on monitor                                                                                                                |                               |
| Bale size                             | Digital                                                           | Digital                                                                                             | Mechanical and digital                                                                              | Digital                                                                                                                          |                               |
| Near full bale                        | Audible, adjustable alert                                         | Audible, adjustable alert                                                                           | Audible, adjustable alert                                                                           | Audible, adjustable alert                                                                                                        |                               |
| Full bale                             | Audible alert                                                     | Audible, adjustable alert                                                                           | Audible, adjustable alert                                                                           | Audible, adjustable alert                                                                                                        |                               |
| Auto wrap                             | Activates when bale reaches preset size                           | Activates when bale reaches preset size                                                             | Activates when bale reaches preset size                                                             | Activates when bale reaches preset size                                                                                          |                               |
| Oversize bale                         | Yes, audible and mechanical alerts                                | Yes, audible and mechanical alerts                                                                  | Yes, audible and mechanical alerts                                                                  | Yes, audible and mechanical alerts                                                                                               |                               |
| Bale forming                          | Digital bale shape indicator                                      | Digital bale shape indicator                                                                        | Digital bale shape indicator                                                                        | Digital bale shape indicator                                                                                                     |                               |
| Monitor console for tractor           | Integrated Display                                                | Integrated Display                                                                                  | Integrated Display                                                                                  | Integrated Display                                                                                                               |                               |
| TIRE SIZE                             |                                                                   |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| Standard                              | 11 L - 14                                                         | Dry - 11 L - 14 Silage - high-flotation 14 L - 16.4, 8 PR                                           | Premium - XL high-flotation 21.5L-16.1, 8 PR                                                        | Premium - XL high-flotation 21.5L-16.1, 8 PR                                                                                     |                               |
| Optional                              |                                                                   | Dry - high-flotation 14 L - 16.1, 8 PR With MegaWide Plus or HC                                     |                                                                                                     | Dry and Precut - High-flotation 14 L - 16.1, 8 PR                                                                                |                               |
| DRIVELINE                             |                                                                   |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| Drive protection                      | Shear-bolt                                                        | Friction clutch or Cut out clutch                                                                   | Friction clutch or Cut out clutch                                                                   | Friction clutch or Cut out clutch                                                                                                |                               |
| PTO speed                             | 540 rpm                                                           | 540 rpm or 1,000 rpm                                                                                | 540 rpm or 1,000 rpm                                                                                | 540 rpm or 1,000 rpm                                                                                                             |                               |
| Type                                  | Constant-velocity (CV)                                            | Constant-velocity (CV)                                                                              | Constant-velocity (CV)                                                                              | Constant-velocity (CV)                                                                                                           |                               |
| PTO lockback collar on tractor hookup | No                                                                | Yes                                                                                                 | Yes                                                                                                 | Yes                                                                                                                              |                               |
| PTO 60-degree free rotation           | No                                                                | Yes                                                                                                 | Yes                                                                                                 | Yes                                                                                                                              |                               |
| TRACTOR REQUIREMENTS¹                 |                                                                   |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| Minimum PTO                           | Dry Hay - 55 hp (42 kW)                                           | Dry Hay - 55 hp (42 kW)                                                                             | Dry Hay and Silage - 65 hp (48 kW) - HC 125 hp (93 kW)                                              | Dry Hay and Silage - 65 hp (48 kW)                                                                                               |                               |
| Selective Control Valves (SCV)        | 1 SCV: Bale Gate<br>2 SCV's: Hydraulic Pickup Lift                | 1 SCV: Bale Gate or Gate Automation<br>2 SCV's: Hydraulic Pickup Lift, Bale Gate or Gate Automation | 1 SCV: Bale Gate or Gate Automation<br>2 SCV's: Hydraulic Pickup Lift, Bale Gate or Gate Automation | 1 SCV: Bale Gate or Gate Automation<br>2 SCV's: Hydraulic Pickup Lift, Bale Gate or Gate Automation<br>3 SVC's: Weave Automation |                               |
| ADDITIONAL INFORMATION                |                                                                   |                                                                                                     |                                                                                                     |                                                                                                                                  |                               |
| Date collected                        | 3-September-2025                                                  | 3-September-2025                                                                                    | 3-September-2025                                                                                    | 3-September-2025                                                                                                                 |                               |

¹ Compared to previous models.



# 1 SERIES SPECIFICATIONS

| MODELS                                | 461R                                                                                                                            | 551M                                                                                               | 561M                                                                                                                            | 561R                                                                                                                            |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| KEY SPECS                             |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Belts - other - width                 | 7 in. (178 cm)                                                                                                                  | 7 in. (178 cm)                                                                                     | 7 in. (178 cm)                                                                                                                  | 7 in. (178 cm)                                                                                                                  |
| Density control                       | Hydraulic                                                                                                                       | Hydraulic                                                                                          | Hydraulic                                                                                                                       | Hydraulic                                                                                                                       |
| Bale size indication                  | Electronic display on monitor                                                                                                   | Electronic display on monitor                                                                      | Electronic display on monitor                                                                                                   | Electronic display on monitor                                                                                                   |
| BALE                                  |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| SIZE- Diameter                        | 4 x 6 ft 1.2 x 1.8 m                                                                                                            | 5 x 5 ft 1.5 x 1.5 m                                                                               | 5 x 6 ft 1.5 x 1.8 m                                                                                                            | 5 x 6 ft 1.5 x 1.8 m                                                                                                            |
| SIZE- Width                           | 46 in. (117 cm)                                                                                                                 | 62 in. (157 cm)                                                                                    | 62 in. (157 cm)                                                                                                                 | 62 in. (157 cm)                                                                                                                 |
| BALER                                 |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| WEIGHT                                | Shipping precutter - 8,665 lb 3,930 kg                                                                                          | Shipping dry - 4,310 lb 1,955 kg<br>Shipping silage - 6,812 lb 3,089 kg                            | Shipping dry - 7,182 lb 3,257 kg<br>Shipping silage - 7,472 lb 3,389 kg                                                         | Shipping precutter - 9,346 lb 4,239 kg                                                                                          |
| -Gate closed                          | 146 in. (371 cm)                                                                                                                | 142 in. (361 cm)                                                                                   | 146 in. (371 cm)                                                                                                                | 146 in. (371 cm)                                                                                                                |
| -Gate open                            | 187 in. (475 cm)                                                                                                                | 179 in. (455 cm)                                                                                   | 187 in. (475 cm)                                                                                                                | 187 in. (475 cm)                                                                                                                |
| HEIGHT- Gate closed                   | 110 in. (279 cm)                                                                                                                | 102 in. (260 cm)                                                                                   | 110 in. (279 cm)                                                                                                                | 110 in. (279 cm)                                                                                                                |
| HEIGHT- Gate open                     | 145 in. (368 cm)                                                                                                                | 128 in. (325 cm)                                                                                   | 145 in. (368 cm)                                                                                                                | 145 in. (368 cm)                                                                                                                |
| WIDTH- w/ Standard tires              | 89 in. (226cm)                                                                                                                  | 89 in. (226cm)                                                                                     | 89 in. (226cm)                                                                                                                  | 89 in. (226cm)                                                                                                                  |
| With opt. tires (Hi-Flotation)        | 96 in. (244 cm)                                                                                                                 | 112 in. (285 cm)                                                                                   | 112 in. (285 cm)                                                                                                                | 112 in. (285 cm)                                                                                                                |
| BALE FORMING                          |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| BELTS - OTHER                         | DiamondTough, triple-weave, single-ply belts                                                                                    |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Density control                       | Hydraulic                                                                                                                       |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Bale size indication                  | Electronic display on monitor                                                                                                   |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| MEGAWIDE™ CLASSIC PICKUP              |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Inside                                |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Flare                                 |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Bars                                  |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Number of teeth                       |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Tooth spacing                         |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Lift control                          |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Gauge wheels                          |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Stripper diameter                     |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| MEGAWIDE™ PLUS PICKUP                 |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Inside                                |                                                                                                                                 | 77 in. (196 cm)                                                                                    | 77 in. (196 cm)                                                                                                                 |                                                                                                                                 |
| Flare                                 |                                                                                                                                 | 87 in. (221 cm)                                                                                    | 87 in. (221 cm)                                                                                                                 |                                                                                                                                 |
| Number of middle teeth                |                                                                                                                                 | 120                                                                                                | 120                                                                                                                             |                                                                                                                                 |
| Number of mega teeth                  |                                                                                                                                 | 8                                                                                                  | 8                                                                                                                               |                                                                                                                                 |
| Gauge wheels                          |                                                                                                                                 | Semi-pneumatic                                                                                     | Semi-pneumatic                                                                                                                  |                                                                                                                                 |
| HIGH-CAPACITY PICKUP                  |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Type                                  | High Capacity and Cutting (HC)                                                                                                  |                                                                                                    |                                                                                                                                 | High Capacity and Cutting (HC)                                                                                                  |
| Inside                                | 77 in. (196 cm)                                                                                                                 |                                                                                                    |                                                                                                                                 | 77 in. (196 cm)                                                                                                                 |
| Flare                                 | 87 in. (221 cm)                                                                                                                 |                                                                                                    |                                                                                                                                 | 87 in. (221 cm)                                                                                                                 |
| Number of middle teeth                | 120                                                                                                                             |                                                                                                    |                                                                                                                                 | 120                                                                                                                             |
| Number of mega teeth                  | 8                                                                                                                               |                                                                                                    |                                                                                                                                 | 8                                                                                                                               |
| Gauge wheels                          | Semi-pneumatic                                                                                                                  |                                                                                                    |                                                                                                                                 | Semi-pneumatic                                                                                                                  |
| Stripper diameter                     | 10 in. (25.4 cm)                                                                                                                |                                                                                                    |                                                                                                                                 | 10 in. (25.4 cm)                                                                                                                |
| WRAPPING SYSTEM                       |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Twine arms                            | 2                                                                                                                               | 2                                                                                                  | 2                                                                                                                               | 2                                                                                                                               |
| Twine ball capacity                   | 8                                                                                                                               | 6                                                                                                  | 8                                                                                                                               | 10                                                                                                                              |
| MONITOR                               |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Gate closed                           | Symbol on monitor                                                                                                               | Symbol on monitor                                                                                  | Symbol on monitor                                                                                                               | Symbol on monitor                                                                                                               |
| Bale size                             | Digital                                                                                                                         | Mechanical and digital                                                                             | Digital                                                                                                                         | Digital                                                                                                                         |
| Near full bale                        | Audible, adjustable alert                                                                                                       | Audible, adjustable alert                                                                          | Audible, adjustable alert                                                                                                       | Audible, adjustable alert                                                                                                       |
| Full bale                             | Audible, adjustable alert                                                                                                       | Audible, adjustable alert                                                                          | Audible, adjustable alert                                                                                                       | Audible, adjustable alert                                                                                                       |
| Auto wrap                             | Activates when bale reaches preset size                                                                                         | Activates when bale reaches preset size                                                            | Activates when bale reaches preset size                                                                                         | Activates when bale reaches preset size                                                                                         |
| Oversize bale                         | Yes, audible and mechanical alerts                                                                                              | Yes, audible and mechanical alerts                                                                 | Yes, audible and mechanical alerts                                                                                              | Yes, audible and mechanical alerts                                                                                              |
| Bale forming                          | Digital bale shape indicator                                                                                                    | Digital bale shape indicator                                                                       | Digital bale shape indicator                                                                                                    | Digital bale shape indicator                                                                                                    |
| Monitor console for tractor           | Integrated Display                                                                                                              | Integrated Display                                                                                 | Integrated Display                                                                                                              | Integrated Display                                                                                                              |
| TIRE SIZE                             |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Standard                              |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Optional                              |                                                                                                                                 | Dry and Precutter - High-flotation 14 L - 16.1, 8 PR                                               | Dry and Precutter - High-flotation 14 L - 16.1, 8 PR                                                                            |                                                                                                                                 |
| DRIVELINE                             |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Drive protection                      | Friction clutch or Cut out clutch                                                                                               | Friction clutch or Cut out clutch                                                                  | Friction clutch or Cut out clutch                                                                                               | Friction clutch or Cut out clutch                                                                                               |
| PTO speed                             | 540 rpm or 1,000 rpm                                                                                                            | 540 rpm or 1,000 rpm                                                                               | 540 rpm or 1,000 rpm                                                                                                            | 540 rpm or 1,000 rpm                                                                                                            |
| Type                                  | Constant-velocity (CV)                                                                                                          | Constant-velocity (CV)                                                                             | Constant-velocity (CV)                                                                                                          | Constant-velocity (CV)                                                                                                          |
| PTO lockback collar on tractor hookup | Yes                                                                                                                             | Yes                                                                                                | Yes                                                                                                                             | Yes                                                                                                                             |
| PTO 60-degree free rotation           | Yes                                                                                                                             | Yes                                                                                                | Yes                                                                                                                             | Yes                                                                                                                             |
| TRACTOR REQUIREMENTS¹                 |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Minimum PTO                           | High Capacity and Cutting (HC) - 125 hp (93 kW)                                                                                 | Dry Hay and Silage - 55 hp (42 kW)                                                                 | Dry Hay and Silage - 55 hp (42 kW)                                                                                              | High Capacity and Cutting (HC) - 125 hp (93 kW)                                                                                 |
| Selective Control Valves (SCV)        | 1SCV: Bale Gate or Gate Automation<br>2 SCV's: Hydraulic Pickup Lift, Bale Gate or Gate Automation<br>3 SVC's: Weave Automation | 1SCV: Bale Gate or Gate Automation<br>2 SCV's: Hydraulic Pickup Lift, Bale Gate or Gate Automation | 1SCV: Bale Gate or Gate Automation<br>2 SCV's: Hydraulic Pickup Lift, Bale Gate or Gate Automation<br>3 SVC's: Weave Automation | 1SCV: Bale Gate or Gate Automation<br>2 SCV's: Hydraulic Pickup Lift, Bale Gate or Gate Automation<br>3 SVC's: Weave Automation |
| ADDITIONAL INFORMATION                |                                                                                                                                 |                                                                                                    |                                                                                                                                 |                                                                                                                                 |
| Date collected                        | 3-September-2025                                                                                                                | 3-September-2025                                                                                   | 3-September-2025                                                                                                                | 3-September-2025                                                                                                                |



## VM, VR, & CR SPECIFICATIONS

### MODELS

### V452M

### V452R

#### KEY SPECS

|                       |                                                       |                                                       |
|-----------------------|-------------------------------------------------------|-------------------------------------------------------|
| Belts - other - width | Six endless belts - 7.3 in. (185 mm)                  | Two endless belts - 22.5 in. (573 mm)                 |
| Density control       | Softcore fully adjustable from the monitor in the cab | Softcore fully adjustable from the monitor in the cab |
| Bale size indication  | Monitor – from the display in cab                     | Monitor – from the display in cab                     |
| Pickup - Bars         | Five                                                  | Five                                                  |

#### BALE

|                |                               |                               |
|----------------|-------------------------------|-------------------------------|
| SIZE- Diameter | 3.3 to 5.4 ft (1.0 to 1.65 m) | 2.6 to 5.25 ft (0.8 to 1.6 m) |
| SIZE- Width    | 3.97 ft (1.21 m)              | 3.97 ft (1.21 m)              |

#### BALER

|                      |                                                                                 |                                                                                 |
|----------------------|---------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| WEIGHT               | 8260 lb (3750 kg)                                                               | 9260 lb (4200 kg)                                                               |
| LENGTH               |                                                                                 |                                                                                 |
| Gate closed          | With bale ramp - 16.9 ft (5.15 m)                                               | With bale ramp - 17.4 ft (5.3 m)                                                |
| HEIGHT               |                                                                                 |                                                                                 |
| Gate closed          | With smallest tires - 9.25 ft (2.82 m)<br>With highest tires - 9.42 ft (2.87 m) | With smallest tires - 9.25 ft (2.82 m)<br>With highest tires - 9.42 ft (2.87 m) |
| WIDTH                |                                                                                 |                                                                                 |
| With narrowest tires | 8.95 ft (2.73 m)                                                                | 9.02 ft (2.75 m)                                                                |
| With widest tires    | 9 ft (2.75 m)                                                                   | 9.58 ft (2.92 m)                                                                |

#### BALE FORMING

|                      |                                                                |                                                               |
|----------------------|----------------------------------------------------------------|---------------------------------------------------------------|
| BELTS - OTHER        | Variable - six endless belts + two front rolls + starter roll  | Variable - two endless belts + two front rolls + starter roll |
| Density control      | Density, softcore fully adjustable from the monitor in the cab |                                                               |
| Bale size indication | Monitor – from the display in cab                              |                                                               |

#### REGULAR PICKUP

|              |                           |                                 |
|--------------|---------------------------|---------------------------------|
| Type         | Rotoflow or MaxiCut HC 68 | Rotoflow or MaxiCut HC 68 or 40 |
| Width        | 7.2 ft (2.2 m)            |                                 |
| Drive        | Cam track                 |                                 |
| Bars         | Five                      |                                 |
| Knives       | Zero or fifteen           | Zero or fifteen or twenty five  |
| Lift control | Hydraulic                 |                                 |
| Gauge wheels | Fixed or caster action    |                                 |

#### WRAPPING SYSTEM

|              |                                                                         |                                                                |
|--------------|-------------------------------------------------------------------------|----------------------------------------------------------------|
| Control      | From monitor                                                            | From monitor                                                   |
| Type         | Net system and optional twine tying                                     | Net system and optional twine tying                            |
| Bale chamber | Net system on rear of baler with capacity for two net rolls             | Net system on front of baler with capacity for three net rolls |
| Wrapper      |                                                                         |                                                                |
| Twine tying  | Optional - two independent twine arms and capacity for ten twine spools |                                                                |

#### MONITOR

|                             |     |  |
|-----------------------------|-----|--|
| Gate closed                 | Yes |  |
| Bale size                   | Yes |  |
| Near full bale              | Yes |  |
| Full bale                   | Yes |  |
| Auto wrap                   | Yes |  |
| Oversize bale               | Yes |  |
| Bale forming                | Yes |  |
| Monitor console for tractor |     |  |

#### TIRE SIZE

|          |                        |                                   |
|----------|------------------------|-----------------------------------|
| Optional | 500/50-17 or 500/55-20 | 500/55-20 520/55R22.5 600/50-22.5 |
|----------|------------------------|-----------------------------------|

#### DRIVELINE

|                                       |                            |                                                                                                                                          |
|---------------------------------------|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Drive protection                      | Cam-clutch                 |                                                                                                                                          |
| PTO speed                             | 540 rpm (124kW - 166.3 hp) | Available on all except MaxiCut HC 40:<br>540 rpm (124kW, 166.3hp)<br>Optional or in base with MaxiCut HC 40:<br>1000 rpm (157kW, 210hp) |
| PTO lockback collar on tractor hookup | Yes                        |                                                                                                                                          |
| PTO 60-degree free rotation           | Yes                        |                                                                                                                                          |

#### TRACTOR REQUIREMENTS<sup>1</sup>

|                                |                |                |
|--------------------------------|----------------|----------------|
| Minimum PTO                    | 100 hp (75 kW) | 120 hp (90 kW) |
| Selective Control Valves (SCV) | Two            |                |

#### ADDITIONAL INFORMATION

|                |                  |                  |
|----------------|------------------|------------------|
| Date collected | 3-September-2025 | 3-September-2025 |
|----------------|------------------|------------------|

<sup>1</sup> Compared to previous models.



## VM, VR, & CR SPECIFICATIONS

| MODELS                                | V462R                                                                                                                              | C452R                                                                                 | C462R                                                 |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------------------------------------------------|
| <b>KEY SPECS</b>                      |                                                                                                                                    |                                                                                       |                                                       |
| Belts - other - width                 | Two endless belts - 22.5 in. (573 mm)                                                                                              | Two endless belts - 22.5 in. (573 mm)                                                 | Two endless belts - 22.5 in. (573 mm)                 |
| Density control                       | Softcore fully adjustable from the monitor in the cab                                                                              | Softcore fully adjustable from the monitor in the cab                                 | Softcore fully adjustable from the monitor in the cab |
| Bale size indication                  | Monitor – from the display in cab                                                                                                  | Monitor – from the display in cab                                                     | Monitor – from the display in cab                     |
| Pickup - Bars                         | Five                                                                                                                               | Five                                                                                  | Five                                                  |
| <b>BALE</b>                           |                                                                                                                                    |                                                                                       |                                                       |
| SIZE- Diameter                        | 2.6 to 6 ft (0.8 to 1.85 m)                                                                                                        | 2.6 to 5.2 ft (0.8 to 1.60 m)                                                         | 2.6 to 6 ft (0.8 to 1.85 m)                           |
| SIZE- Width                           | 3.97 ft (1.21 m)                                                                                                                   | 3.97 ft (1.21 m)                                                                      | 3.97 ft (1.21 m)                                      |
| <b>BALER</b>                          |                                                                                                                                    |                                                                                       |                                                       |
| WEIGHT                                | 9700 lb (4400 kg)                                                                                                                  | 15210 lb (6900 kg)                                                                    | 15750 lb (7100 kg)                                    |
| LENGTH                                |                                                                                                                                    | 25.8 ft (7.85 m)                                                                      | 25.8 ft (7.85 m)                                      |
| Gate closed                           | With bale ramp - 174 ft (5.3 m)                                                                                                    |                                                                                       |                                                       |
| HEIGHT                                |                                                                                                                                    | 126.75 in. (321.9 cm)                                                                 | 130.25 in. (330.8 cm)                                 |
| Gate closed                           | With smallest tires - 9.71 ft (2.96 m)<br>With highest tires - 9.88 ft (3.01 m)                                                    |                                                                                       |                                                       |
| WIDTH                                 |                                                                                                                                    |                                                                                       |                                                       |
| With narrowest tires                  | 9.02 ft (2.75 m)                                                                                                                   | 9.8 ft (2.98 m)                                                                       | 9.8 ft (2.98 m)                                       |
| With widest tires                     | 9.58 ft (2.92 m)                                                                                                                   | 10.79 ft (3.29 m)                                                                     | 10.79 ft (3.29 m)                                     |
| <b>BALE FORMING</b>                   |                                                                                                                                    |                                                                                       |                                                       |
| BELTS - OTHER                         | Variable - two endless belts + two front rolls + starter roll                                                                      |                                                                                       |                                                       |
| Density control                       | Density, softcore fully adjustable from the monitor in the cab                                                                     |                                                                                       |                                                       |
| Bale size indication                  | Monitor – from the display in cab                                                                                                  |                                                                                       |                                                       |
| <b>REGULAR PICKUP</b>                 |                                                                                                                                    |                                                                                       |                                                       |
| Type                                  | Rotoflow or MaxiCut HC 68 or 40                                                                                                    | MaxiCut HC 68 or 40                                                                   |                                                       |
| Width                                 | 7.2 ft (2.2 m)                                                                                                                     |                                                                                       |                                                       |
| Drive                                 | Cam track                                                                                                                          |                                                                                       |                                                       |
| Bars                                  | Five                                                                                                                               |                                                                                       |                                                       |
| Knives                                | Zero or fifteen or twenty five                                                                                                     | Fifteen or twenty-five                                                                |                                                       |
| Lift control                          | Hydraulic                                                                                                                          |                                                                                       |                                                       |
| Gauge wheels                          | Fixed or castor action                                                                                                             |                                                                                       |                                                       |
| <b>WRAPPING SYSTEM</b>                |                                                                                                                                    |                                                                                       |                                                       |
| Control                               | From monitor                                                                                                                       | From monitor                                                                          | From monitor                                          |
| Type                                  | Net system and optional twine tying                                                                                                | Standard: Net tying only. Capacity for three net rolls. Net system on front of baler. |                                                       |
| Bale chamber                          | Net system on front of baler with capacity for three net rolls                                                                     |                                                                                       |                                                       |
| Wrapper                               |                                                                                                                                    | Wrapping system with storage capacity for ten plus two film rolls                     |                                                       |
| Twine tying                           | Optional - two independent twine arms and capacity for ten twine spools                                                            |                                                                                       |                                                       |
| <b>MONITOR</b>                        |                                                                                                                                    |                                                                                       |                                                       |
| Gate closed                           | Yes                                                                                                                                |                                                                                       |                                                       |
| Bale size                             | Yes                                                                                                                                |                                                                                       |                                                       |
| Near full bale                        | Yes                                                                                                                                |                                                                                       |                                                       |
| Full bale                             | Yes                                                                                                                                |                                                                                       |                                                       |
| Auto wrap                             | Yes                                                                                                                                |                                                                                       |                                                       |
| Oversize bale                         | Yes                                                                                                                                |                                                                                       |                                                       |
| Bale forming                          | Yes                                                                                                                                |                                                                                       |                                                       |
| Monitor console for tractor           |                                                                                                                                    | ISOBUS                                                                                | ISOBUS                                                |
| <b>TIRE SIZE</b>                      |                                                                                                                                    |                                                                                       |                                                       |
| Optional                              | 500/55-20 520/55R22.5 600/50-22.5                                                                                                  | 500/45-22.5 tandem 620/40R22.5 tandem                                                 | 500/45-22.5 tandem 620/40R22.5 tandem                 |
| <b>DRIVELINE</b>                      |                                                                                                                                    |                                                                                       |                                                       |
| Drive protection                      | Cam-clutch                                                                                                                         | Cam-clutch                                                                            | Cam-clutch                                            |
| PTO speed                             | Available on all except MaxiCut HC 40: 540 rpm (124kW, 166.3hp)<br>Optional or in base with MaxiCut HC 40: 1000 rpm (157kW, 210hp) |                                                                                       |                                                       |
| PTO lockback collar on tractor hookup | Yes                                                                                                                                |                                                                                       |                                                       |
| PTO 60-degree free rotation           | Yes                                                                                                                                |                                                                                       |                                                       |
| <b>TRACTOR REQUIREMENTS¹</b>          |                                                                                                                                    |                                                                                       |                                                       |
| Minimum PTO                           | 120 hp (90 kW)                                                                                                                     | 120 hp (90 kW)                                                                        | 120 hp (90 kW)                                        |
| Selective Control Valves (SCV)        | Two                                                                                                                                | Power beyond tractor hydraulics preferred but not mandatory                           |                                                       |
| <b>ADDITIONAL INFORMATION</b>         |                                                                                                                                    |                                                                                       |                                                       |
| Date collected                        | 3-September-2025                                                                                                                   | 3-September-2025                                                                      | 3-September-2025                                      |



You run **advanced equipment.**  
You deserve **advanced support.**

JOHNDEERE.COM | JOHNDEERE.CA



Your John Deere dealer is committed to helping you keep your equipment in solid working order. With a complete inventory of genuine John Deere Parts, highly trained service technicians, and a thorough understanding of your business, your John Deere dealer knows how to keep you and your equipment up and running.

**A STRONG NAME IN EQUIPMENT AND A STRONG DEALERSHIP NETWORK. GET IT ALL WITH JOHN DEERE.**

This literature has been compiled for worldwide circulation. While general information, pictures and descriptions are provided, some illustrations and text may include finance, credit, insurance, product options and accessories NOT AVAILABLE in all regions. PLEASE CONTACT YOUR LOCAL DEALER FOR DETAILS. John Deere reserves the right to change specification and design of all products described in this literature without notice. John Deere, the leaping deer symbol, and green and yellow trade dress are trademarks of Deere & Company. Copyright 2025 Deere & Company. All Worldwide Rights Reserved. THIS MATERIAL IS THE PROPERTY OF DEERE & COMPANY. ALL USE, ALTERATIONS AND/OR REPRODUCTION NOT SPECIFICALLY AUTHORIZED BY DEERE & COMPANY IS PROHIBITED.



**JOHN DEERE**