

9RX 710, 9RX 770, 9RX 830 TRACTORS

710-830 ENGINE HORSEPOWER



JOHN DEERE



POWERFUL POSSIBILITIES

Get more done with up to 830 rated horsepower (913 max horsepower) available on John Deere 9RX models.

That extra power lets small grain farmers pull twice the cart load, in the hills, and do it 1 mph faster.¹ Row-crop farmers can now till at the optimal depth and speed, disking 100 more acres per day² without having to choose between job completion and job quality.

Extra power lets you pull wider implements, so you can do more in less time. This lets you eliminate 1,000 ripper passes per year.³ The increase in hydraulic flow allows you to precisely control your implements and maintain steering authority even under max loads.

Both of these help improve the overall seeding performance. The JD18 engine achieves emission compliance with no need for diesel exhaust fluid (DEF).

Run confidently at high speeds with the improved visibility, easy steering and a smooth, quiet ride in the John Deere 9RX 710, 9RX 770, and 9RX 830 Tractors. The G5Plus display with the G5 Advanced Package, integrated StarFire™ 7500 receiver, Autonomy Ready, and other precision ag technologies make these models our smartest tractors yet.



¹Comparing a 9RX 640 with a N560F and a C850 cart filled half way vs a 9RX 830 with a N560F and a C850T cart filled all the way up both maxed out on power and ran in Auto Mode. The hills ranged from 8 degrees to 12 degrees in slope.

²Claim based on internal field test data comparing a 40' 2680H at 11.9mph on a 9RX 640 to a 45' 2680H at 13.4 mph on a 9RX 830 both at max power for 8 hours a day at 4" deep in corn stalks.

³Calculation assumes going from a 11 shank 2730 to a 13 shank 2730 over 4500 acres with 1 machine.



PRODUCTIVITY OF 9RX 710, 9RX 770, 9RX 830 2

Getting more done and hitting tight seeding and tillage windows is the name of the game. The added power of the high-horsepower 9RX models give you the productivity to do that.

IMPROVED OPERATOR EXPERIENCE 8

Long days will be easier with the improved operator experience of the 9RX models. You can run confidently at high speeds in comfort thanks to the redesigned 9RX cab.

EASE OF DAILY MAINTENANCE 10

Finish daily maintenance checks sooner and get to the field earlier with these 9RX models designed with input from farmers just like you.

PRECISION AG TECHNOLOGIES12

Learn about all the precision ag technologies that let the high-horsepower 9RX tractors do more. The displays, receivers, applications and more make these 9RX tractors the smartest tractors in the market today.

SPECIFICATIONS 14

The high-horsepower 9RX models were designed from the ground up to provide you with the power you need and ensure you get the maximum power to the ground. See the specifications that make it all work together.

AFTERMARKET OFFERINGS15

See what aftermarket offerings are available for these 9RX tractors.



MORE PRODUCTIVITY

Hit critical seeding windows with ease. Now you can pull twice the cart load in the hills and go 1 mile per hour (mph) faster while doing it¹. The improved hydraulic flow of up to 168 gallons per minute allows you to maintain speed, traction and fan speed even in challenging working conditions. Feel confident steering under heavy hydraulic loads. Choose from single (56 GPM), dual (112 GPM), or triple (168 GPM) hydraulic pump options.



With the 9RX models, you can pull wider tillage tools at the optimal depth and speed. The extra power lets you stay ahead of the planter in the spring or rip all the corn stalks before the ground freezes, giving you more tillage options. Now you can pull a John Deere 45-foot 2680H High Performance Disk or a 13-standard 2730 Combination Ripper, at ideal speeds and depths with more confidence. It all adds up to disking 100 more acres per day² or eliminating 1,000 ripper passes per year.³

¹Comparing a 9RX 640 with a N560F and a C850 cart filled half way vs a 9RX 830 with a N560F and a C850T cart filled all the way up both at max power. The hills ranged from 8 degrees to 12 degrees in slope.

²Claim based on internal field test data comparing a 40' 2680H at 11.9mph on a 9RX 640 to a 45' 2680H at 13.4 mph on a 9RX 830 both at max power for 8 hours a day at 4" deep in corn stalks.

³Calculation assumes going from an 11-shank 2730 to a 13-shank 2730 on 40 acre square fields covering a total of 4500 acres with 1 machine.

DESIGNED FROM THE GROUND UP



JD18 (18L) Engine.

The JD18 engine provides reliable power, easy serviceability and an extra power bulge when you need it. With up to 830 hp, you can pull your largest carts and drills to hit critical seeding windows or pull wider tillage tools at faster speeds and at ideal depths.



John Deere designed these powerful tractors from the ground up to bring you the high-horsepower tractors that meet your needs. We knew what you were asking for because we worked with farmers just like you when designing these tractors.

The JD18 engine gives you a rated horsepower of up to 830 (913 max) HP and a max torque of 3,123 lbs./ft. You'll also get increased speed control in the field and responsive shifts in manual or auto mode with the new e21™ transmission built to handle the increased power of these tractors. Plus, you can eliminate 800 gallons of diesel exhaust fluid (DEF) per year since the JD18 engine meets Final Tier 4/ Stage V using technology requiring only one fluid, diesel fuel.

The higher-horsepower 9RX Tractors feature a new structural frame that can ballast up to 84,000 lbs. Longer undercarriages and new track assemblies help put the power to the ground, all while maintaining flotation and compaction levels nearly identical to existing 9RX models.

¹CI Calculation based off DEF consumption from Nebraska Test Data of a Steiger 620 QuadTrac running at 1900 RPMs in 6th gear for 330 hours.

Lighting packages.

Ride in comfort all day and into the night with the Premium or Ultimate lighting packages. We focus on directing light at what is important for you to see in the field.

Suspension and quiet cab.

The cab suspension features three degrees of freedom with an isolated subframe and four shocks letting you glide over rough terrain at high speeds in the field. The cab is so quiet you'll wonder if the tractor is even running.

Fuel tank, no DEF, Fast Fill System.

Run longer with the 515-gallon (1952-L). These models also feature an optional Fast Fill System, which allows you to fill up in less than four minutes. And you'll only need to fill one fluid because these models meet emissions standards with no need for diesel exhaust fluid (DEF).

BUILT FOR COMFORT AND SPEED

Run confidently at high speeds and glide over rough ground, thanks to the CommandView™ 4 Plus cab. First, you'll enter the comfortable cab easier with the 65-degree stair design. The improved cab suspension gives you the best ride experience ever in a 9 Series Tractor¹. The cab suspension features three degrees of freedom with an isolated subframe and four shocks. This isolates you from the tractor frame, giving you a smooth ride, even in rough terrain. Plus, you can easily steer these tractors under load with ActiveCommand Steering (ACS™).

The great visibility of the 9RX models fills you with even more confidence to run at top speeds. Easily check your surroundings thanks to a 20% increase in right-side visibility. With 15% more floor space you can easily swivel your seat without obstructions and fit a cooler, toolbox, or other gear inside the cab.² The extra space also allows you to shift in the seat to stay comfortable running long hours. The 330-degree windshield wiper keeps the windshield clean so you can see the additional ground you're covering with ease.



¹Based on internal testing

²Compared to 2025 9RX 640 cab



GET IN THE FIELD EARLIER EACH DAY

All daily maintenance on the 9RX models can be done from ground level, meaning you'll spend less time getting ready and get into the field earlier. The sight gauges make it quick and easy to check fluid levels. Easily add and remove ballast with forklift-ready weights.

Both the air filter and fuel fill are at ground level, and these tractors feature an optional Fast Fill System, letting you fill the tank in under four minutes. Once you're in the field, the reversible fan option keeps you running by improving engine cooling performance.

Get to the field earlier and ride in comfort with increased power and productivity in the high-horsepower 9RX tractors. It all adds up to getting more work done.





HERE FOR YOU. HERE FOR YOUR MACHINE

JOHN DEERE CONNECTED SUPPORT

Your 9RX Tractor comes standard with JDLink¹ hardware, and you can activate JDLink service for free from your John Deere Operations Center[™] account. Once activated, your John Deere dealer offers the connection needed to keep you running when it's crunch time. JDLink provides the bridge to proactive and predictive alerts that identify issues before they arise and from there, the dealer can remotely assess the problem, helping you to save time and money.

Service ADVISOR[™] Remote

Allows your dealer to remotely analyze Diagnostic Trouble Codes in near real time so technicians arrive on-site with the right parts and the right tools to quickly repair your tractor.

Expert Alerts

Enable your dealer to remotely monitor your tractor. With Expert Alerts, they can proactively alert you to a potential issue.

Remote Display Access

Remotely and quickly assist or get assistance with in-cab display setup and adjustments for optimal tractor performance.

Learn more at JohnDeere.com/ConnectedSupport or JohnDeere.ca/ConnectedSupport.

POWERGARD[™]

The PowerGard Protection Plan² offers valuable extended warranty coverage to protect your 9RX Series Tractor from the unexpected and to ensure it's ready when you need it. PowerGard is available when purchased during the initial 12-month basic warranty.^{3,4,5}

Learn more at JohnDeere.com/PowerGard or JohnDeere.ca/PowerGard.

JOHN DEERE PROTECT

The John Deere Protect Maintenance Plus Plan includes annual expert inspections and scheduled maintenance events and helps you maintain original performance and uptime of your John Deere 9RX Series tractor.

Learn more at JohnDeere.com or JohnDeere.ca.

¹Activation required. JDLink hardware comes standard with the machine. You can turn on JDLink connected service in your Operations Center account for free.

JDLink requires a cellular connection to transfer information from your machine to John Deere Operations Center. Consult your John Deere Dealer for coverage availability.

²The PowerGard Protection Plan does not cover attachments, maintenance or wear parts, nor other non-covered components specifically mentioned in the contract terms.

³All new John Deere 9RX Series tractors come with a standard basic warranty of 12 months. Terms, conditions, exclusions, and warranty limitations apply.

⁴PowerGard deductible applies to any failure under PowerGard coverage.

⁵High Horsepower 9RX models are only eligible for the 36 month / 1500 hour or 3000 hour plans.

9RX HIGH-HORSEPOWER TRACTORS

G5^{Plus} CommandCenter™ Display

Bigger. Faster. Clearer.

Ready to see more? Know more? DO more? The G5^{Plus} CommandCenter™ Display gives you a bigger picture of your 9 Series Tractor's performance and work in the field.

- 12.8-inch touchscreen – 35% larger to make on-the-go in-field adjustments easier¹
- 3x faster processor allows for quicker boot times
- High resolution 1080p screen for brighter, clearer views
- 2 digital and 4 analog video camera inputs
- Essential to be ready for future autonomous and sense-and-act technology

The G5^{Plus} CommandCenter comes with a permanent AutoTrac™ and Section Control license. And a permanent AutoTrac™ RowSense™ license is also available. And for even more automation productivity there's also an optional G5 Advanced Package that bundles our most popular precision ag. More than a display, this is your path to the future of precision ag. Experience the benefits of the larger, faster, and clearer display.

John Deere Operations Center™

Unlock the full power of your farm data.²


Imagine, managing your farm operations anytime, anywhere. You can with John Deere Operations Center™. It's a free², online farm management system that enables 24/7 access to farm information through web, tablet, or mobile phone. Operations Center empowers you to manage your operation more efficiently, do a better job on every pass, reduce costs, and improve profitability.

With Operations Center, you can seamlessly connect data from your fields, your machines, and your operators and advisors. It puts at your fingertips all the information you need to maximize critical farm operations, from tillage, planting and seeding to applying and harvesting.

- Setup and manage your critical farm operations
- Plan work to reduce errors and gain efficiencies
- Monitor job quality and productivity in near real time
- Analyze this season's results to improve next season's crops

¹Compared with previous Generation 4 displays

²Activation required. JDLink hardware comes standard with the machine. The customer can turn on the JDLink service in their Operations Center account for free. JDLink requires a cellular connection to transfer information from machine to JDLink website. Consult your John Deere Dealer for coverage availability.

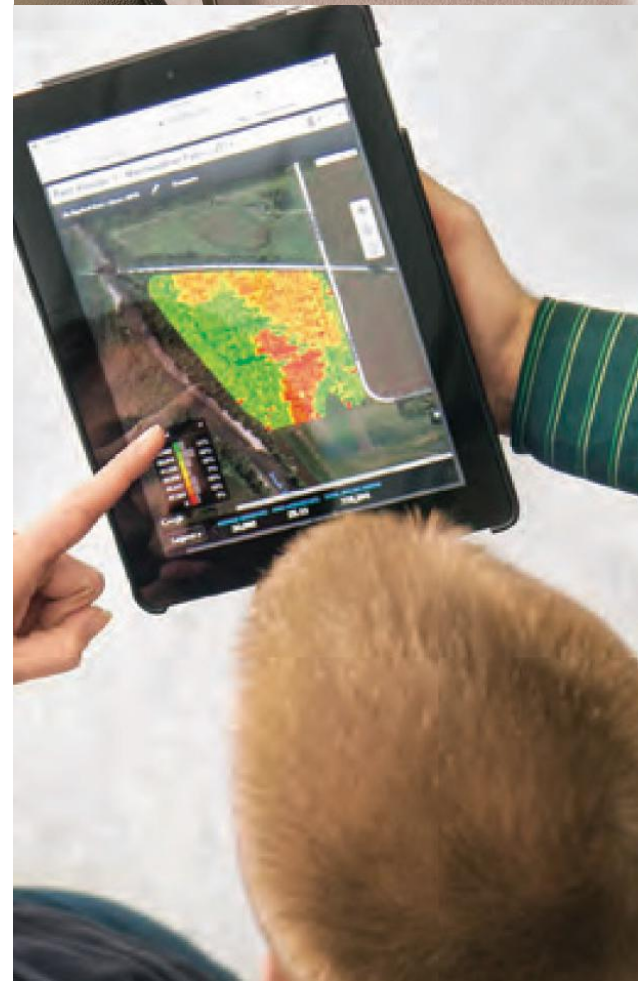



**SEE MORE.
KNOW MORE.
DO MORE.**

G5 Advanced Package

More automation means more productivity and less stress. That's what you get with the G5 Advanced Package, which bundles five of our most advanced guidance and automation technologies into a single renewable license. That gives you not only a lower up-front cost, but also technology that gets better over time, as you'll get automatic access to new features as they are released.

The G5 Advanced Package includes:

AutoPath™

Save time and make your job easier in complex fields by eliminating guesswork when deciding which guidance line to use.

AutoTrac™ Turn Automation

AutoTrac Turn Automation gives you hands-off and stress-free confidence from one pass to the next. Consistently enter each pass to reduce untilled gaps and rework. Precise implement placement keeps spacing accurate, even on side hills or around curves.

AutoTrac™ Implement Guidance

Precise implement placement cuts out wide-narrow guess rows and keeps spacing accurate.

Machine Sync

On-the-go, stress-free unloading in every condition. Work faster, even with inexperienced grain cart operators.

In-Field Data Sharing

Between multiple machines and fields, share guidance lines, coverage maps, as-applied pass-to-pass data, and field totals, without wasteful radio chatter.

9RX HIGH-HORSEPOWER TRACTORS SPECIFICATIONS


POWER	9RX 710	9RX 770	9RX 830	9RX 710 Scraper Special	9RX 770 Scraper Special
Rated PTO power (hp SAE) at Rated Engine Speed (1900 erpm)**	335 hp (249 kW)	335 hp (249 kW)	335 hp (249 kW)	NA	NA
Rated Engine power PS (hp ISO) at rated engine speed (ECE-R120)*	710 hp (522 kW)	770 hp (566 kW)	830 hp (610 kW)	710 hp (522 kW)	770 hp (566kw)
Max Engine power PS (hp ISO) at max engine power speed (ECE-R120)*	781 hp (574 kW)	847 hp (623 kW)	913 hp (672 kW)	781 hp (574 kW)	847 hp (623kw)
Seeding Hydraulic Intelligent Power Management (Option), Torque Rise (Nominal Engine) at 1400 rpm	40			NA	
Power Budge (Nominal Engine) at 1700 rpm	10%			10%	
ENGINE	Diesel, in-line, 6-cylinder, wet-sleeve cylinder liners with 4 valves-in-head				
Manufacturer	JD18 (John Deere 18L)				
Rated speed	1,900 rpm				
Aspiration	Dual turbochargers in series; Primary fixed displacement turbocharger and secondary wastegated turbocharger, air-to-air aftercooling, and cooled EGR (exhaust gas recirculation) air-to-air aftercooling and cooled exhaust gas recirculation (EGR)				
Engine Fan	Standard (Variable speed hydraulic drive) and Optional Reversible Fan (Interval based or on-demand)				
Filter, engine air	Radial pleated dual stage with exhaust aspiration				
Displacement	1098 cu in. (18L)				
Bore and stroke	5.82 in. (148 mm) x 6.85 in. (174 mm)				
Compression ratio	16.1:1				
Lubrication	Full-pressure, full-flow filtration with bypass				
Filter, engine oil	(2) Replaceable spin-on style oil filters (500hr oil change Interval)				
TRANSMISSIONS					
e21™ 21-speed PowerShift 40 kph (25 mph); 21F, 11R with Efficiency Manager™	Standard				
ELECTRICAL SYSTEM (Three or four batteries in parallel)					
Alternator/Battery	330 ampere / 12 volt				
Total cold cranking amps	4750 (5-950 CCA grp 31 batteries)				
Starter	(2) 12 volt 7.4 hp (5.5 kW) starter motors				
AXLE FINAL DRIVES					
Outboard planetary with three planetary gears	Standard				
AXLES					
Sprocket Diameter	47.2 in. (1200 mm)				
Drive lug engagement quantity in sprocket	7.5				
TRACKS	Camso 3500 and 6500 (MICHELIN BIBTRACK 150 and 250) Tracks				
762 mm (30 in.) width Camso® AG 3500 (MICHELIN BIBTRACK 150) Tracks	Standard			NA	
762 mm (30 in.) width Camso® Ag 6500 (MICHELIN BIBTRACK 250) Tracks	Available			NA	
914 mm (36 in.) width Camso® AG 3500 (MICHELIN BIBTRACK 150) Tracks	Available			NA	
914 mm (36 in.) width Camso® AG 6500 (MICHELIN BIBTRACK 250) Tracks	Available			NA	
762 mm (30 in.) width Camso® Scraper 6500 (MICHELIN BIBTRACK 250 SCR) Tracks	NA			Standard	
TRACK SPACING					
Fixed 2,235 mm (88 in.) Spacing, only compatible with 762 mm (30 in.) Tracks	Standard				
Fixed 3,048 mm (120 in.) Spacing	Available			NA	
STEERING					
John Deere ActiveCommand Steering (ACS™)	Standard				
DIFFERENTIAL LOCK					
Full-Locking electrohydraulic, front and rear axle, with AutoMode	Standard				
Auto disengagement for various selectable turn angles.	Standard				
HYDRAULIC SYSTEM (type)	Closed-center, pressure/flow compensated				
Selective control valves	Electro-Hydraulic 4 - 6 factory or field installed Base: (4) 1/2 in. (12.7 mm) Couplers Optional: (5-6) 1/2 in. (12.7 mm) couplers factory installed Optional: 7th & 8th SCV available through fieldkits Optional (Seeding Hydraulic 6 SCV Stack): (3) 1/2 in. (12.7 mm) couplers + (3) 3/4 in. (19.05 mm) couplers factory or field installed installed			Electro-Hydraulic 6 Standard 3/4" couplers	
Maximum pressure	2,900 psi (20,000 kPa)				
Maximum pump flow: Single Pump	56 U.S. gpm/ 212 Lpm			NA	
Maximum pump flow: Dual Pumps	112 U.S. gpm/ 424 Lpm			NA	
Maximum pump flow: Triple Pumps	168 U.S. gpm/ 636 Lpm			Standard	
Available flow at a single SCV - 1/2 in. (12.7 mm) coupler	35 U.S. gpm/ 132 Lpm			NA	
Available flow at a single SCV with high-flow - 3/4 in. (19.05 mm)	45 U.S. gpm/ 170 Lpm				
DRAWBAR					
Cat 5 Drawbar Clevis Maximum Vertical Load 8,618.3 kg (19,000 lb)	Standard			NA	
Two Hook (Legacy) Scraper Maximum Vertical Load 12,020 kg (26,500 lb)	NA			Available	
Four-Hook Scraper Maximum Vertical Load 14,741 kg (32,500 lb)	NA			Available	
AG Scraper Attachment Maximum Vertical Load 8,618.3 kg (19,000 lb)	Available			NA	
PTO (Power Take Off), Rear, Independent					
45 mm (1-3/4 in.), 20-spline, 1,000-rpm, Engine Speed RPM 1812	Available			NA	
Integrated Technology					
Integrated AutoTrac	Standard				
Connectivity Hardware	Includes integrated cab wiring harness, antenna, JDLink Modem (MTG) and Ethernet harnesses. Ethernet harnesses may vary per configuration.				
Connectivity Subscription	Connectivity service is subject to country availability. JDLink connectivity can be enabled in John Deere Operations Center.				
ISOBUS Implement Connection	Standard (ISO 11783)				
GS™ CommandCenter™	Standard				
Extended Display	Available				
StarFire™ 7500 Integrated Receiver	Standard				
BRAKES	Hydraulic power, wet-disc, self adjusting				
Hydraulic power, wet disc, self adjusting on front and rear axle	Standard				
Hydraulic trailer brakes	Available				
CAPACITIES					
Fuel Tank	1952 L (515.7 gal)				
Cooling system	117 L (30.9 gal)				
Crankcase with filter	71.5 L (18.9 gal)				
Hydraulic oil with high take out (offboard reservoir)	201.4 L (53.2 gal)				
Drivetrain (Transmission and axles)	88 in. (56,774 mm) Spacing: 201 L (53 gal) and 120 in. (77,419.2 mm) Spacing: 226 L (60 gal)			88 inch spacing: 201L (53 gal)	
MISCELLANEOUS					
Cab glass area	73.81 sq ft (6.86 sq m)				
Max Ballast	76,000 lbs (34,500 kg)	84,000 lbs (38,100 kg)	84,000 lbs (38,100 kg)	76,000 lbs (34,500 kg)	76,000 lbs (34,500 kg)
Base Weight (88 in. Spacing)	74,000 lbs (33,565.8 kg)				
Degrees of Articulation	38°				
Degrees of Oscillation	15°				
Degrees of Undercarriage Oscillation	±10°				
Wheelbase Length	4,620 mm (181.9 in)				
Turning Radius (Rear Axle Centerline)	22.3 ft. (6,795 mm)				
Overall Machine Height (Tip of Exhaust)	12' 5" (3784.5 mm)				
Overall Machine Length	28' 9" (8829 mm)				

Specifications and design subject to change without notice. Pre-production models shown. *Power callout refers to average (50% MOE) net brake power measured and corrected for ambient conditions according to the EC emissions directive. Equivalents: EU 2016/1628, Stage V; 97/68/EC for non-Stage V and SAE Standards J1995. **9RX 710 - 9RX 830 rated values are stated when tractor is stationary. Values are based on factory observed data.

9RX HIGH-HORSEPOWER TRACTORS PARTS


SELECTIVE CONTROL VALVE (SCV) UPGRADE KITS

Modify your SCV's hydraulic connection capability with the two upgrade kits below.

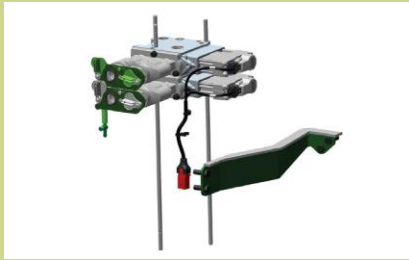

7th and 8th SCV KIT

BXX11475: Adds both the 7th and 8th position SCVs with standard flow 140 LPM (37 GPM) valves and ½ inch couplers. Tractor must have an existing 6th position SCV.

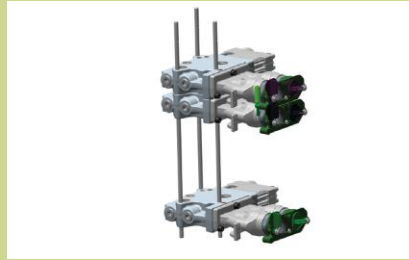

High Flow SCV Upgrade Kit

BXX10548: Replaces existing 140 LPM valve and ½ inch coupler with 180 LPM valves and ¾ inch couplers for positions 1, 4, and 5. Requires existing ½ inch couplers in positions 1, 4, and 5 which will be removed.

ASK ABOUT OUR AFTERMARKET PARTS

John Deere has one of the most responsive dealer networks in the business. If you have a specific need, head to a local dealer and use their expertise to find the part that will best serve you.

Once you select a part, know that your equipment is in safe hands with the technician during installation. We offer a 12-month limited parts and labor warranty¹ and multiple financing options as needed.² Check out a few parts we have to offer.



Sprocket Mud Scrapers

BXX10723: Add mileage to your rubber track belts. Inner drive sprocket mud scrapers remove dirt and mitigate harmful debris buildup from all 4 drive sprockets, helping to extend the life of your track system.



Ag Scraper Drawbar Adapter Mounting Bracket

BXX10899: Expand your versatility for limited hour land-leveling needs. Convert your Ag drawbar to a Scraper Drawbar using this adapter mounting bracket which is compatible with a 60 mm pin sleeve.



Rear Mini Mono Weight 340 KG

TR134703: Easily adjust ballast for any job. Add rear axle ballast with these compact rear-mini-mono weights using a fork truck or hoist. Up to 4 weight blocks can be added to 120 in. (304.8 cm) tread spacing applications, or up to 2 weight blocks can be added to 88 in. (223.52 cm) tread spacing applications. Requires modular weight bracket and hardware.



Debris Shield, Rear Idler

BXX10748: Add extra protection for your valuable track system. This kit shields the tensioning cylinder from dirt and debris. Easy bolt-on kit installed in under 30 minutes with basic tools.

¹12 month/unlimited hour warranty on most new John Deere agriculture parts when installed by an authorized John Deere Dealer. 6 month/unlimited hour warranty for most new John Deere agricultural and turf equipment parts. See John Deere Service Parts Warranty US & Canada and participating dealers for more details.

²Financing on approved John Deere Financial credit only. Contact your Multi-Use Account merchant or dealer for complete details.

SUPPORTED BY ONE OF THE MOST RESPONSIVE DEALER NETWORKS IN THE BUSINESS.

Nobody cares more about keeping your equipment in solid working order than your John Deere dealer. With a complete inventory of genuine John Deere parts, highly trained service technicians, and a thorough understanding of your business, your John Deere dealer knows how to keep you and your equipment up and running.

A strong name in equipment, and a strong dealership network: get it all with John Deere.

This literature has been compiled for worldwide circulation. While general information, pictures and descriptions are provided, some illustrations and text may include finance, credit, insurance, product options and accessories NOT AVAILABLE in all regions. PLEASE CONTACT YOUR LOCAL DEALER FOR DETAILS. John Deere reserves the right to change specification and design of all products described in this literature without notice. John Deere, the leaping deer symbol, and green and yellow trade dress are trademarks of Deere & Company. Copyright 2026 Deere & Company.

JohnDeere.com
JohnDeere.ca



JOHN DEERE