

Frontier Spreaders



Broadcast Spreaders • Pendular Spreaders

Looking for the right spreader for your job? Frontier Broadcast and Pendular Spreaders have all the features you need to cover a lot of ground quickly and efficiently. Get a wide, even swath to spread salt, sand, seed, or fertilizer. With eleven models to choose from, we've got the right spreader for your operation.

Try the **10 Series Broadcast Spreaders** to spread grass seed on your lawn or salt on walkways in the winter. Available in both pull-type and PTO models. The ground-driven spreaders give you fast, accurate coverage for large lawns. Or try the PTO-driven spreader for greater control of discharge speed.

But if you need greater versatility, the PTO-driven **20 Series Broadcast Spreaders** handle bigger loads of lime, fertilizer, and other similar materials. These sturdy spreaders are ideal for landscape and small property maintenance. Optional iMatch™ allows you to hook up to your tractor effortlessly. (SS2067B only.)

Or go with the **Frontier Pendular Spreaders** for excellent precision and the versatility to spread material of different weights, sizes, and textures, including powdered fertilizer or any other high-moisture products. With large-capacity hoppers, you can spread longer and get the job done faster.

Frontier Spreaders are sold and supported by John Deere, the most trusted name in farm, ranch and lawn equipment. To help you select the right model of Frontier Spreaders talk to your local John Deere dealer, your exclusive source of Frontier Equipment.

www.BuyFrontier.com



Frontier Broadcast Spreaders are available in two affordable lineups – the steel-hopper 10 Series and the polyethylene-hopper 20 Series. With a capacity range of 3.5 to 10.6 cubic feet and a spread distance of 20 to 46 feet, you get reliable, versatile performance to meet all your spreading needs.



Pendular Spreaders come in four high-performing models to handle commercial jobs. Ranging from 792 to 2,205 pounds of capacity and offering an accurate 17- to 46-foot spread, Pendular Spreaders allow you to cover more ground in less time.

lime, or fertilizer.

Details – 10 Series Broadcast Spreaders



The seamless, high-quality steel **10 Series Broadcast Spreaders** are ideal for a uniform spread, so you avoid overlapping. Pull behind your lawnmower or Gator™ to make quick work of small spreading chores.



The **Ground-Driven** Broadcast Spreader hooks up to small tractors or ATV's and is perfect for working your garden, nursery, greenhouse, or athletic field. Plus, this versatile tool can spread salt over snow- and ice-covered pathways.



With the **PTO-Driven** Broadcast Spreader, you can spread seed, granular fertilizers, crystalline herbicide, pesticide, sand, and salt at 540 RPM's and in three diverse patterns. Each unit features heat-treated paint to prevent corrosion, and comes standard with a fixed agitator and shielded driveline gearbox.



A rugged deflector shield (*optional*) helps ensure uniform spread swath and keeps salt on your sidewalk.



Optional wheel agitator keeps material from packing and bridging over the discharge.



A swath control lever lets you choose either a row or broadcast spread, while also varying the direction of the pattern.

Details – 20 Series Broadcast Spreaders



The **20 Series Broadcast Spreaders** feature a polyethylene hopper and stainless steel spreading components for strong resistance to salt, sand, and other corrosive material. This helps prevent rust and weather damage to minimize maintenance and extend spreader life.



The siderow discharge deflector (*optional*) is easily adjusted to give you improved accuracy and control during discharge.



The feed rate lever is conveniently operated from the driver's seat to open the spreader gate when dropping seed and fertilizer.



Frontier SS2067B Broadcast Spreader is compatible with the iMatch ASAE Category 1 quick-attach hitch system. iMatch converts your tractor's 3-point hitch to fixed hooks and attaching points for quick and easy connection. (*iMatch sold separately and must be ordered from factory as iMatch.*)



Standard agitator helps prevent clogging in the hopper when using powdered or high moisture fertilizer. The durable hopper gate is stainless steel to avoid corrosion.




Adjustable stainless steel fins let you change the spread pattern from left to right to center to control your distribution pattern. And the rugged, corrosion-resistant spreading disc helps protect and extend the life of the fins.

Details – Frontier Pendular Spreaders



The **Frontier Pendular Spreaders** are equipped with reinforced fiberglass hoppers and stainless steel spreading components. Plus, the heavy-duty drive system is oil-bath lubricated for longer life.

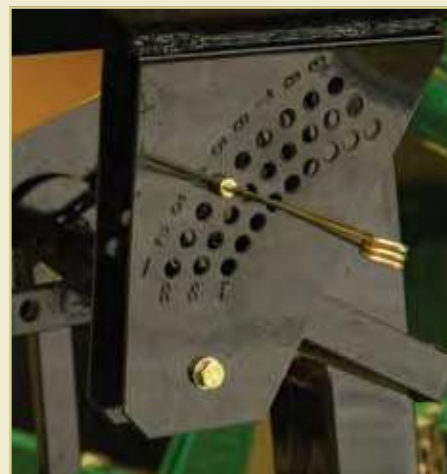

Make simple adjustments to your discharge rate by changing the settings on the spreader rate control. Move the pin higher to increase flow rate or lower to decrease flow rate.



For high-moisture products such as damp fertilizers, the optional rubber insert provides a quick and easy flow through the spout.



The filter grate (*optional*) helps prevent clods and foreign material from entering the chute. (*SS11 & SS12 Series only.*)




The optional hydraulically controlled SCV lever opens the spreader gate to drop seed and fertilizer, conveniently from the seat of your tractor. (*SS11 & SS12 Series only.*)



The agitator extension (*optional*) helps break apart clumps and keeps material from compacting to provide consistent flow when spreading.



Rotate the optional multi-directional tip left, right, or center for different spread positions. Ideal for spreading near walls or fences, the tip can be placed upright, allowing for close-distance discharge.

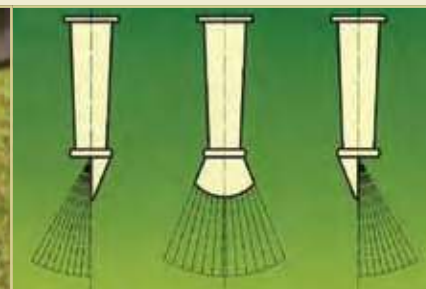

Specifications

Pendular Spreaders

Model #'s	SS1079P	SS1116P	SS1190P	SS1220P
Hopper Material	Reinforced Fiberglass	Reinforced Fiberglass	Reinforced Fiberglass	Reinforced Fiberglass
Hopper Weight Capacity	792 lb. (359 kg)	1,168 lb. (530 kg)	1,808 lb. (820 kg)	2,205 lb. (1000 kg)
Hopper Volume Capacity	12.4 cu. ft. (.35 m ³)	22.5 cu. ft. (.64 m ³)	34.7 cu. ft. (.98 m ³)	42.4 cu. ft. (1.2 m ³)
Machine Weight	250 lb. (113 kg)	321 (146 kg)	339 (154 kg)	343 (156 kg)
Swath Spread	17- 47 ft. (5.2-14.3 m)	17- 47 ft. (5.2-14.3 m)	17- 47 ft. (5.2-14.3 m)	17- 47 ft. (5.2-14.3 m)
Load Height	43 in. (1.1 m)	38 in. (1 m)	43 in. (1.1 m)	47 in. (1.2 m)
Tractor PTO HP Range	20- 60 hp (14.9- 44.7 kW)	20- 60 hp (14.9- 44.7 kW)	20- 60 hp (14.9- 44.7 kW)	20- 60 hp (14.9- 44.7 kW)
PTO RPM	540	540	540	540
PTO Shaft Category [Heavy-Duty Shielded 1-3/8 in. (3.5 cm)]	1	1	1	1
Three-Point Hitch Category	1	1 or 2	1 or 2	1 or 2
iMatch™ Compatible (Note: Must be ordered from factory as iMatch™)	No	No	No	No

Broadcast Spreaders

Model #'s	SS1022B	SS1035B	SS1023B	SS1036B	SS1067B	SS2036B	SS2067B
Hopper Material	Steel	Steel	Steel	Steel	Steel	Polyethylene	Polyethylene
Hopper Weight Capacity	226 lb. (103 kg)	362 lb. (164 kg)	226 lb. (103 kg)	362 lb. (164 kg)	678 lb. (308 kg)	362 lb. (164 kg)	678 lb. (308 kg)
Hopper Volume Capacity	3.5 cu. ft. (.1 m ³)	5.6 cu. ft. (.2 m ³)	3.5 cu. ft. (.1 m ³)	5.6 cu. ft. (.2 m ³)	10.6 cu. ft. (.3 m ³)	5.6 cu. ft. (.2 m ³)	10.6 cu. ft. (.3 m ³)
Machine Weight	62 lb. (28 kg)	84 lb. (38 kg)	81 lb. (37 kg)	102 lb. (46 kg)	125 lb. (57 kg)	102 lb. (46 kg)	125 lb. (57 kg)
Shipping Weight (per pair)	200 lb. (91 kg)	250 lb. (113 kg)	232 lb. (105 kg)	290 lb. (132 kg)	320 lb. (145 kg)	290 lb. (132 kg)	320 lb. (145 kg)
Swath Spread	20 ft. (6.1 m)	20 ft. (6.1 m)	23 ft. (7 m)	23 ft. (7 m)	46 ft. (14 m)	23 ft. (7 m)	46 ft. (14 m)
Hopper Width	32 in. (81 cm)	35 in. (89 cm)	32 in. (81 cm)	35 in. (89 cm)	42 in. (107 cm)	35 in. (89 cm)	42 in. (107 cm)
Load Height	39.6 in. (101 cm)	45 in. (114 cm)	31 in. (79 cm)	34 in. (86 cm)	40 in. (102 cm)	34 in. (86 cm)	40 in. (102 cm)
Tractor PTO HP Range	16- 30 hp (12-22 kW)	16- 45 hp (12-34 kW)	16- 30 hp (12-22 kW)	16- 45 hp (12-34 kW)	16- 55 hp (12-41 kW)	16- 45 hp (12-34 kW)	16- 55 hp (12-41 kW)
PTO RPM	NA (Ground Driven)	NA (Ground Driven)	540	540	540	540	540
PTO Shaft Category [Heavy-Duty Shielded 1-3/8 in. (3.5 cm)]	NA (Ground Driven)	NA (Ground Driven)	1	1	1	1	1
Three-Point Hitch Category	NA (Single Point Hitch)	NA (Single Point Hitch)	0 and 1	0 and 1	1	0 and 1	1
iMatch™ Compatible (Note: Must be ordered from factory as iMatch™)	NA (Single Point Hitch)	NA (Single Point Hitch)	No	No	Optional	No	Optional



This literature has been compiled for worldwide circulation. While general information, pictures and descriptions are provided, some illustrations and text may include finance, credit, insurance, product options and accessories NOT AVAILABLE in all regions. PLEASE CONTACT YOUR LOCAL JOHN DEERE DEALER FOR DETAILS. Frontier Equipment reserves the right to change specifications, design and price of products described in this literature without notice. Copyright 2009, Frontier Equipment.

www.BuyFrontier.com