

334 P

Skid Steer



JOHN DEERE





334 P-TIER SKID STEER

PUSH THROUGH IN A BIG NEW WAY

For over 50 years, we've relied on you — the owners and operators who run them — to tell us what makes our skid steers work on real jobsites. Inspired by everything we learned, we've created our 334 P-Tier to raise the industry bar. We packed horsepower under the hood, redefined cab comfort, and maximized performance and stability. Then we equipped this large-frame model with pressure-compensated, load-sensing (PCLS) hydraulics for advanced multifunctioning. And added optional integrated machine technology, high-flow auxiliary hydraulics to optimize attachments, and your choice of control styles and performance features. All to enhance the operator experience and help propel expectations — and your productivity.

FEATURES

Designed to deliver

Impressive 118 gross horsepower packed into a proven compact frame helps the 334 P-Tier Skid Steer effortlessly push through the most demanding tasks. Plus it can capably maneuver around a wide range of jobsites and also transports easily.

Handle the pressure

PCLS hydraulic system provides improved multifunctioning, smoother machine control, and better fuel economy than open-center hydraulic systems. Outstanding auxiliary hydraulic flow of 44 gallons per minute empowers the addition of high- or super-flow attachments.

Flex your attachment muscle

Equip your 334 P-Tier with your choice of over 100 available John Deere attachments to boost the versatility of your fleet. Expanded mulching head and cold planer models can help open up new work opportunities.

All about the operator

Next-generation cab filled with ergonomic creature comforts like a premium heated/ventilated seat, low-effort joystick controllers with adjustable performance modes, 25-button sealed-switch module to streamline settings, and deluxe LCD monitor puts operators of all skill levels at ease. Larger glass area increases visibility for the operator. Sealed and pressurized to minimize dust and noise, the cab is also isolated from the frame for a smooth ride.

Grade it easy

Optional Onboard Grade indicate provides a real-time readout of cross-slope (machine roll) and mainfall slope (machine pitch) on the in-cab monitor. Use relative value readout to alter grades relative to existing or reference grades.



**PCLS HYDRAULIC SYSTEM
IMPROVES FUEL ECONOMY
& MULTIFUNCTIONING**
COMPARED TO OPEN-CENTER HYDRAULIC SYSTEMS

Repeat performance

Shorten cycle times and speed production in repetitive boom applications with the optional EH boom performance package that automates functions.

Load warrior

Height to hinge pin of 11 feet enables the 334 P-Tier to easily load tandem-axle dump trucks, fill hoppers, and feed mixers. Additional reach to truck-bed height comes in handy for moving pallets of pavers or other weighty materials.

In a whole new light

Rely on the 8-inch touch-screen display to clearly access and monitor vital machine data. Standard LED deluxe lighting and rearview camera plus optional Surround View further enhance jobsite visibility.

Run long

Large tank capacity for both fuel and diesel exhaust fluid (DEF) lets you run all day without having to refill. Tilt the hood up for simple ground-level access to the dipstick, filters, and fuel and fluid fills. Convenient cab-footwell access helps speed cleaning.

Safety features

Standard personal-protection features include in-cab-activated boom lock and triple-interlock system that detects the presence of the operator.



334 P-TIER SKID STEER



LARGE FUEL & DEF TANKS
EXTEND RUN TIMES
BETWEEN REFILLS

Connected machines

John Deere construction equipment comes with in-base connectivity — free from subscriptions or annual renewals. Analyze critical machine data, track utilization, review diagnostic alerts, and more from **the John Deere Operations Center™**. The Operations Center also enables John Deere Connected Support™, which uses data from thousands of connected machines to proactively address issues before they arise. With your approval, your dealer can also remotely monitor machine health, diagnose problems, and even update machine software without a trip to the jobsite.*


*Availability varies by region and product. Options not available in every country.



334 P-TIER SKID STEER SPECIFICATIONS

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.

Engine		334 P-TIER	
Manufacturer and Model	Yanmar 4TNV94FHT	Displacement	3.1 L (186.3 cu. in.)
Non-Road Emission Standard	EPA Final Tier 4 (FT4)/EU Stage IV	Rated Engine Speed	2,500 rpm
Cylinders	4	Torque Rise	39% at 1,700 rpm
Gross Rated Power (ISO 14396)	88.0 kW (118.0 hp) at 2,500 rpm	Aspiration	Turbocharged, intercooled
Net Peak Power (SAE J1349 / ISO 9249)	85.5 kW (114.7 hp) at 2,500 rpm	Air Cleaner	Dry dual element
Peak Torque	395 Nm (291.3 ft.-lb.) at 1,700 rpm		
Cooling			
Fan Type	Variable-speed hydraulic drive and reversing fan drive standard		
Powertrain			
Type	Electrohydraulic (EH); 4 – 100 heavy-duty (HD) continuous-loop chain		
Travel Speeds			
Low	12.1 km/h (7.5 mph)		
High	19.3 km/h (12.0 mph)		
System High-Pressure Relief	29 999 kPa (4,351 psi)		
Axles		Induction-hardened, 1-piece forged axle shafts with maintenance-free oil-bath lubrication of inner and outer axle bearings	
Maximum Axle Torque	9289 Nm (6,830 lb.-ft.)		
Tractive Effort	4218 kgf (9,300 lbf)		
Final Drive		High-strength, adjustment-free chains	
Brakes		Integral, automatic, spring-applied, hydraulically released, wet-disc park brake	
Hydraulics			
Pump Flow (variable)		Hydraulic Horsepower Flow (calculated)	
Minimum	94.6 L/m (25 gpm)	Standard	37.5 kW (50.3 hp)
Maximum	166.6 L/m (44 gpm)	High	66.0 kW (88.6 hp)
System Pressure at Couplers	23 787 kPa (3,450 psi)	High Flow / High Pressure	76.6 kW (102.7 hp)
High Pressure	27 579 kPa (4,000 psi)	Auxiliary Hydraulics	Connect-under-pressure with 1/2-in. and 3/4-in. flat-faced couplers
Cylinders			
Type	John Deere heat-treated, chrome-plated, polished cylinder rods, hardened steel (replaceable bushings) pivot pins		
Electrical			
Voltage	12 volt		
Battery Capacity	950 CCA		
Alternator Rating	120 amp		
Lights		Deluxe LED: 4 front and 1 rear standard	
Operator's Station			
ROPS (ISO 3471) / FOPS (ISO 3449) structure with quick-pivot standard			
Tires/Wheels			
Standard Tire Size	14 x 17.5 14 PR Titan HD2000-II		
Serviceability			
Refill Capacity			
Fuel Tank	134.4 L (35.5 gal.)		
Operating Weights			
Base Machine	4660 kg (10,264 lb.)		
Machine Dimensions			
A Length Without Bucket	3.18 m (125.2 in.) (10 ft. 5 in.)		
B Length With Foundry Bucket	3.83 m (150.7 in.) (12 ft. 7 in.)		
C Width Without Bucket	1.99 m (78.5 in.) (6 ft. 7 in.)		
D Height to Top of ROPS	2.21 m (87.0 in.) (7 ft. 3 in.)		
E Height to Hinge Pin	3.35 m (132.0 in.) (11 ft. 0 in.)		
F Dump Height With Foundry Bucket	2.71 m (106.7 in.) (8 ft. 11 in.)		
G Dump Reach With Foundry Bucket	0.81 m (31.9 in.) (2 ft. 8 in.)		
H Wheelbase	1.27 m (49.9 in.) (4 ft. 2 in.)		
I Ground Clearance With 14 x 17.5 Tire	0.25 m (9.7 in.)		
J Angle of Departure	23.5 deg.		
K Front Turn Radius With Foundry Bucket	2.14 m (84.3 in.) (7 ft. 0 in.)		
L Dump Angle (full lift height)	48 deg.		
M Bucket Rollback (ground level)	35 deg.		

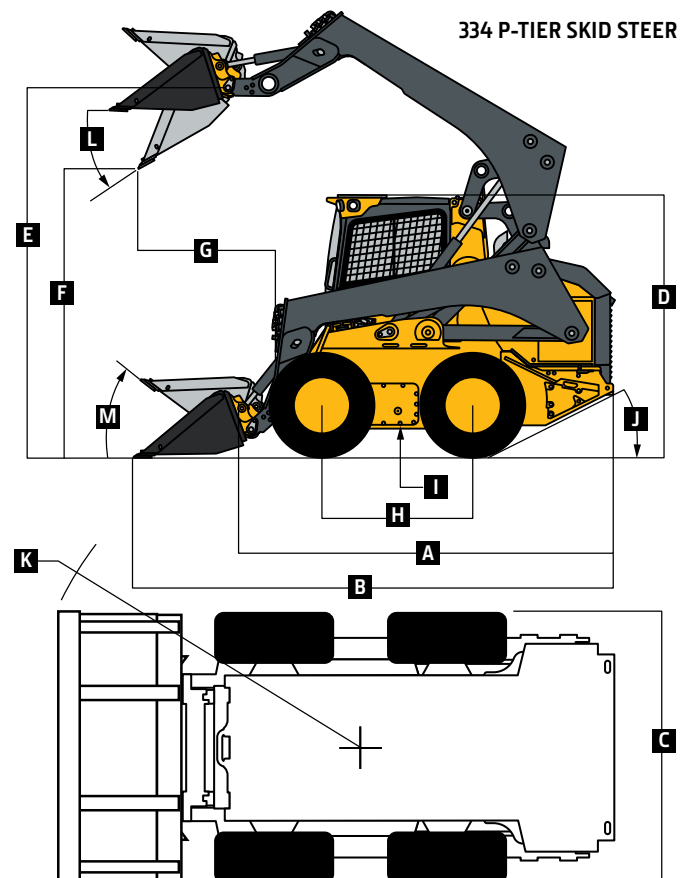

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.

Loader Performance		334 P-TIER
Bucket Type		
Tipping Load With 1 Standard Counterweight Set With Foundry Bucket		3632 kg (8,000 lb.)
SAE Rated Operating Capacity With 1 Standard Counterweight Set and Foundry Bucket		1816 kg (4,000 lb.)
Breakout Force	<i>With Foundry Bucket</i>	<i>With Construction Bucket</i>
Boom	3859 kg (8,500 lb.)	3587 kg (7,900 lb.)
Bucket	6265 kg (13,800 lb.)	4313 kg (9,500 lb.)

Additional equipment

Key: ● Standard ▲ Optional or special

See your John Deere dealer for further information.

334 P Engine ● Meets EPA Final Tier 4/EU Stage IV emissions ● Yanmar 4TNV94FHT ● Auto-idle ● Automatic fan tensioner ● Automatic preheat ● Electronic injection system ▲ Engine air precleaner kit ● Fuel tank, 134.4 L (35.5 gal.) ● John Deere COOL-GARD™ II Extended-Life Engine Coolant ● John Deere Plus-50™ 10w30 initial engine oil fill⁶ ● 4-cylinder, 88.0 kW (118 gross hp)/85.5 kW (114.7 net hp), 3.1-L (186.3 cu. in.) displacement ● 5-micron primary fuel filter and water separator ▲ Cold-weather starting package	334 P Electrical (continued) ● Deluxe instrumentation monitor with: Operator-selectable monitoring – Hour meter, engine rpm, battery voltage, diagnostics, monitor configuration, engine coolant temperature, hydraulic oil temperature / LED warning indicators – Glow plug, seat switch, seat belt, door open, auxiliary hydraulics, park brake engaged, 2-speed engaged, stop, low engine oil pressure, engine coolant over-temperature, battery not charging, air filter restriction, and hydraulic filter restriction ● Deluxe LED lighting package with additional cab-integrated side lights (2) ● Triple-interlock operator-presence control system ● Backup alarm ● Battery, 950 CCA ▲ Hazard warning lights ▲ Strobe light, amber ● Horn	334 P Operator's Station (continued) ● 12-volt power port / Dome light / Cargo storage / Beverage holder ● Air conditioning with heater/defroster ● AM/FM radio with auxiliary input and Bluetooth® for audio streaming and hands-free calling ● Floor mat with left footrest ● Rearview mirror ● Rearview camera ▲ Surround View
Cooling System ● Coolant surge tank ● Variable-speed hydraulically driven fan cooling system ● Reversing fan drive	Operator's Station ● Deluxe cab headliner ● Electrohydraulic (EH) ISO-pattern joystick controls ● ISO controls with programmable detents and EH boom performance package;¹ also includes EH joystick performance package* ▲ Onboard grade indication: Grade-control option delivers onboard readout within LCD monitor that provides slope of blade (cross-slope direction) and main-fall (fore/aft direction) within ±0.5-percent accuracy ● Keyless-start sealed-switch module with integrated anti-theft system and operator memory preference settings ● Electronic push-button auxiliary controls ● Pull-down adjustable lap bar ● Quick-pivot ROPS ● Rear window ● Top window ● Sliding/locking/glass side windows ● ROPS/FOPS operator structure ● Glass cab enclosure ● Seat belt, 51 mm (2 in.), retractable ▲ Shoulder belt, 51 mm (2 in.) or 76 mm (3 in.) ▲ Severe-duty cab door and wiper system ● Premium high-back cut-and-sewn air-ride seat, heated and ventilated	Loader ● In-cab boom lockout to secure loader before exiting seat ● Patented John Deere Power Quik-Tatch™ (no grease required) ● Patented John Deere vertical-lift boom ● Hydraulic self-leveling on/off and ride control
Powertrain ● High-strength adjustment-free final-drive chains ● Automatic spring-applied hydraulically released wet-disc park brake ● Wet-disc brakes ● Transmission, 2 speed		Other ● Convenient front and rear tie-downs ● Environmental drains for all fluid reservoirs ● 14 x 17.5 14 PR Titan HD2000-II ▲ 14 x 17.5 NHS, Camso SKS ▲ 14 x 17.5 14 PR Galaxy Hulk ▲ 14 x 17.5 Treaded Brawler SolidFlex – Non-Pneumatic ● Chrome exhaust stack ▲ Engine oil/hydraulic fluid-sampling kit ▲ Forestry protection packages ● Heavy-duty rear grille ● Rear counterweights, 1 set, 78 kg (172 lb.) ▲ Additional rear counterweights (1 or 2 sets in addition to the single set included as standard equipment), 78 kg (172 lb.) (each set) ▲ 3-point lift kit ▲ SMV sign kit ▲ Spare tire and wheel ● JDLINK™ wireless communication system (available in specific countries; see your dealer for details)
Hydraulic System ● John Deere hydraulic cylinders with cushioned boom cylinders ● John Deere heat-treated, chrome-plated cylinder rods with replaceable bushings ● Connect-under-pressure auxiliary couplers ● Quick-check hydraulic fluid-level sight glass ● 1,000-hour, 5-micron hydraulic filter ● Pressure-compensating, load-sensing hydraulic system, auxiliary hydraulic flow of 94.6–166.6 L/m (25–44 gpm) ● Axial-piston hydrostatic pump		⁶500-hour engine oil-change intervals when John Deere Plus-50 oil and John Deere oil filter are used. *EH joystick performance package features switchable accelerator/decelerator, selectable propel speeds, creep control, boom- and bucket-speed settings, and 12-volt 3- and 14-pin attachment-control harness with dash-mounted 4th-function rocker switch. ¹EH boom performance package features include EH bucket self-level up and down, return to dig, return to carry, and boom height kick-out.
Electrical ● Automatic engine/hydraulic shutdown protection system ● Auxiliary hydraulics operator-presence system ● Courtesy lighting		

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.

Net engine power is with standard equipment including air cleaner, exhaust system, alternator, and cooling fan, at standard conditions per SAE J1349 and DIN 6270B, using No. 2-D fuel at 35 API gravity. Gross power is without cooling fan. Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with SAE standards. Except where otherwise noted, these specifications are based on a unit with standard equipment, full fuel tank, and 79-kg (175-lb.) operator.




MK334PAU (25-06)



JOHN DEERE